




Adaptor jack/jack
7/16 jack (female) / SC jack (female)

AD-D2SC25A/H4-H4

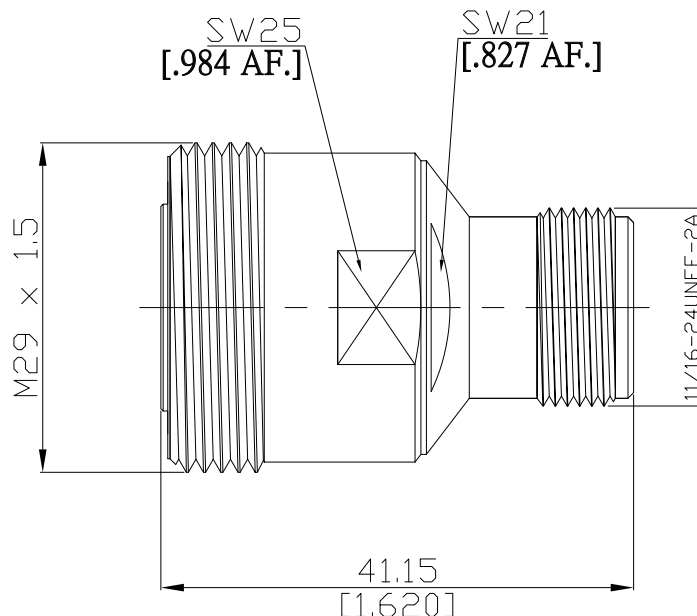

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

7/16 according to

IEC 61169-4

SC according to

MIL-C-39012; MIL-STD-348A/309

Electrical Data

Impedance

50 Ω

Frequency

DC to 7.5 GHz

Mechanical Data

Coupling mechanisms

7/16 (Screw-lock); SC (Screw-lock)

Weight

N/A

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating

Piece Parts (7/16)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Piece Parts (SC)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Packing

Single or 100