


Adaptor jack/jack
Precision N jack (female) / Precision TNC jack (female)

AD-PCN2PCT25B/93-93

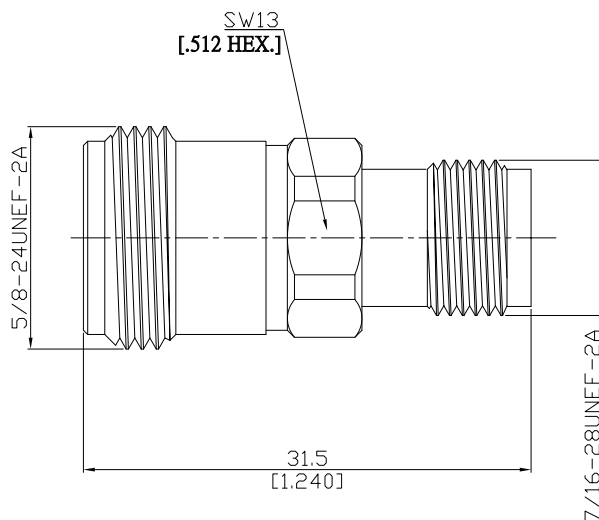

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

Precision N according to IEC 60169-16; MIL-STD 348A/402
Precision TNC according to IEC 60169-26

Electrical Data

Impedance 50 Ω
Frequency DC to 18 GHz
VSWR (Return Loss) 1.30 (≥ 17.69 dB)
Insertion Loss $\leq 0.1 \times \sqrt{F}$ (GHz) dB

Mechanical Data

Coupling mechanisms Precision N (Screw-lock); Precision TNC (Screw-lock)
Weight N/A

Environmental Data

Temperature range -60°C to +100°C
RoHS compliant

Material And Plating

Piece Parts (Precision N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Piece Parts (Precision TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Packing

Single or 100