


Adaptor plug/jack
SSMA Snap-on plug (male) / SMA jack (female)

AD-SAQ1A25A/991-91

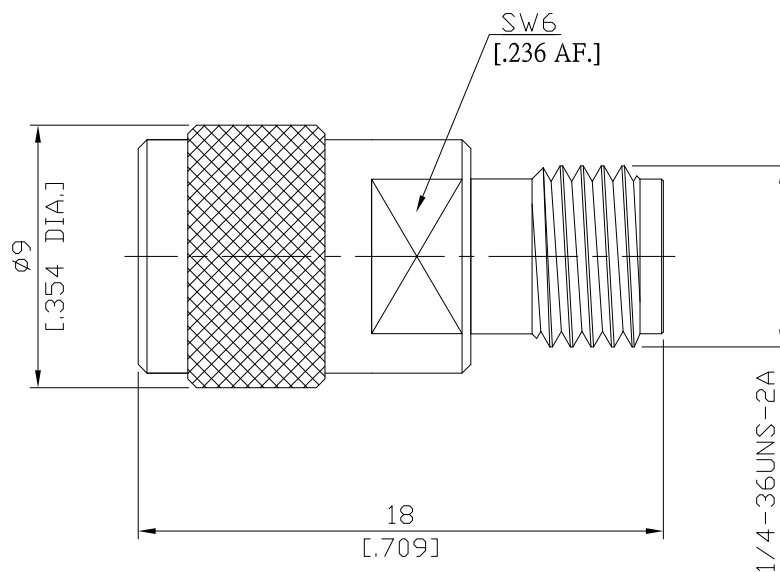

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SSMA snap-on according to
SMA according to

IEC 61169-18; MIL-C-39012; MIL-STD-348A/319
IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

Electrical Data

Impedance 50 Ω
Frequency DC to 18 GHz
VSWR (Return Loss) ≤ 1.20 (≥ 20.83 dB)
Insertion Loss $\leq 0.05 \times \sqrt{F}$ [GHz] dB

Mechanical Data

Coupling mechanisms SSMA Snap-On male (Snap-lock), SMA female (Screw-lock)
Weight N/A

Environmental Data

Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

Piece Parts (SSMA Snap-On)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Beryllium Copper	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)
Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

Packing

Single or 100