




T-Adaptor 3 plugs  
 SMA plug (male) / SMA plug (male)

ADT-A1A1A15A/111-111-111

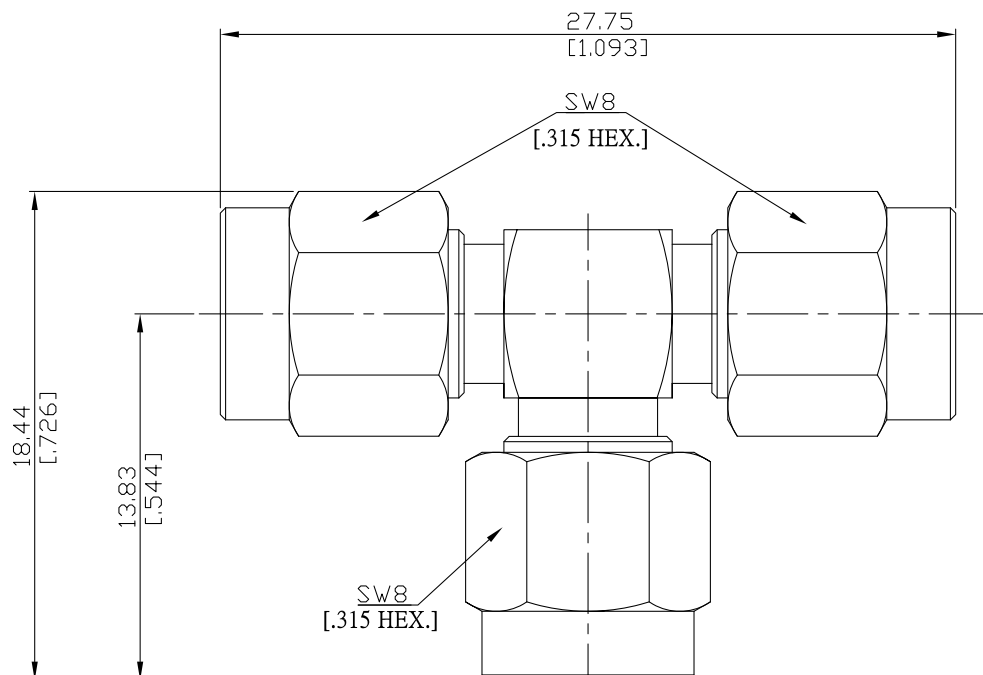

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to

IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

#### Electrical Data

Impedance

50 Ω

#### Mechanical Data

Coupling mechanisms

Screw-lock

Weight

0.0083 kg

#### Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

#### Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)
Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)

#### Packing

Single or 100