


T-Adaptor 3 jacks  
N jack (female) / N jack (female)

ADT-N2N2N25A/H3-H3-H3

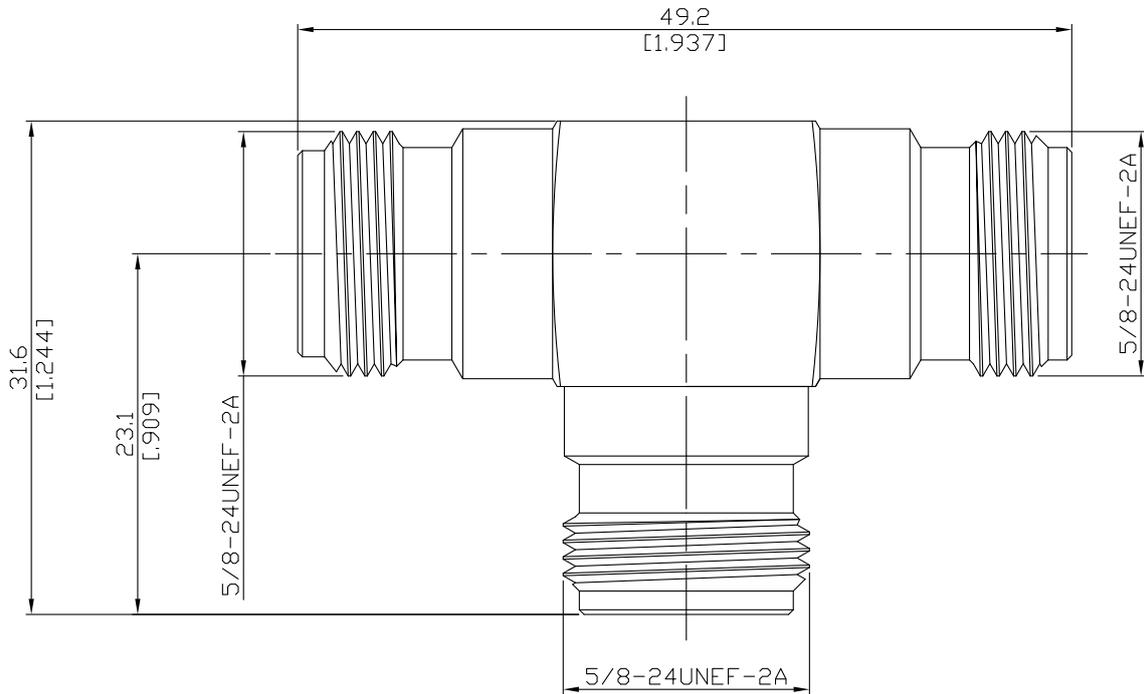

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 61169-16; MIL-STD-348A/304; MIL-C-39012; CECC 22210

**Electrical Data**

Impedance 50 Ω

**Mechanical Data**

Coupling mechanisms Screw-lock

Weight N/A

**Environmental Data**

Temperature range -65°C to +165°C

RoHS compliant

**Material And Plating**

Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

**Packing**

Single or 100