




2.92mm (Male) Shorting Cap Plug

K1AS00-1450A/9XX

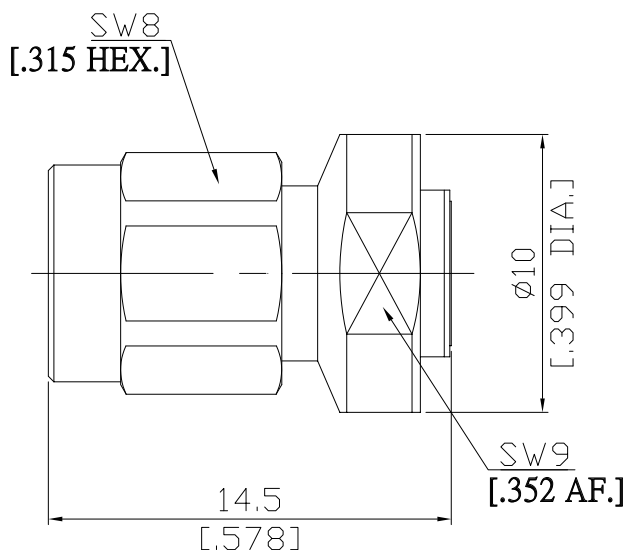

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-35; IEEE Std 287-2007
Mechanically compatible with SMA and 3.5 mm

Electrical Data

Impedance $\sim 0 \Omega$ (shorted), DC

Mechanical Data

Coupling mechanisms Screw-lock
Weight N/A

Environmental Data

Temperature range -55°C to +165°C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Coupling nut	Stainless Steel	Passivated

Packing

Single