


2.92mm Jack (Female) Connector Solder/Solderless Contact Attachment
for .085, .086 Cable, RG405; Rosnol RSR-085, RSF-085, EF405 Cable
DC-40GHz VSWR1.2

K2E50-EZ085A / 9X

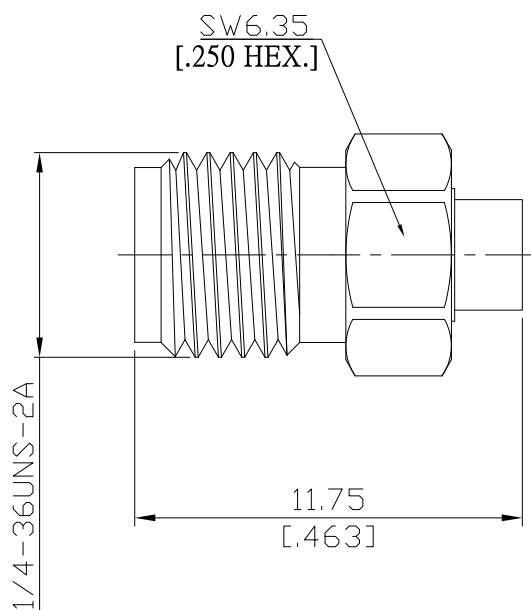

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to
Mechanically Compatible with

IEC 61169-35, IEEE Std 287-2007
3.5mm and SMA

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.20 (≥ 20.83 dB)
Insertion Loss	≤ 0.04 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 3.0 mΩ
Outer Contact Resistance	≤ 2.0 mΩ
Test Voltage (at sea level)	750 V rms
Working Voltage (at sea level)	250 V rms
RF Leakage	≥ 100 dB up to 1 GHz

- Limitations are possible due to the used cable type -

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PEI	
Barrel	Brass	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)

2.92mm Jack (Female) Connector Solder/Solderless Contact Attachment
for .085, .086 Cable, RG405; Rosnol RSR-085, RSF-085, EF405 Cable
DC-40GHz VSWR1.2

K2E50-EZ085A / 9X

Mechanical Data

Coupling mechanisms	Screw Lock
Mating Cycles	≥ 500
Coupling Test Torque	1.7 Nm
Recommended Torque	0.9 Nm

Environmental Data

Temperature Range	-55°C to +165°C
Thermal Shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Suitable Cables

.085, .086, RG405; Rosnol RSR-085, RSF-085, EF405

Packing

Single or 100