


N SHORT  
N Jack (female)

N2AS50-1700A/H3

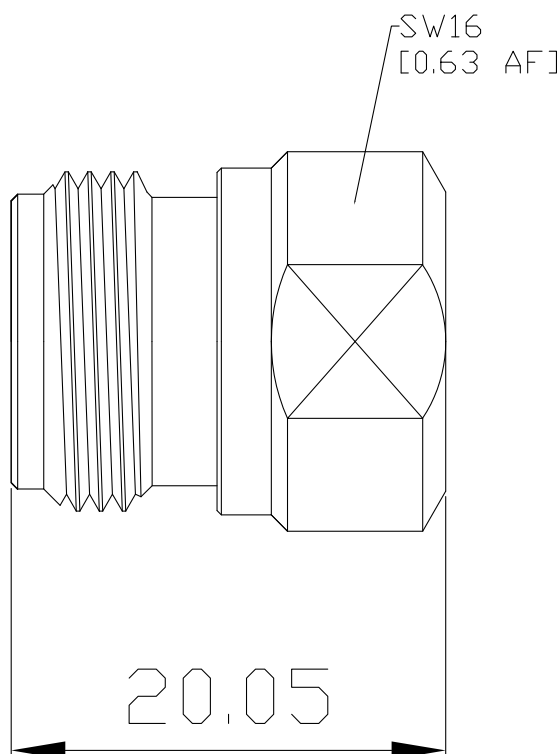

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to MIL-C-39012; MIL-STD-348A/310

#### Electrical Data

Impedance 50  $\Omega$   
Frequency DC to 12.4 GHz

#### Mechanical Data

Coupling mechanisms Screw-lock  
Weight N/A

#### Environmental Data

Temperature range -65°C to +165°C  
RoHS compliant

#### Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating (Nickel underplated)
Body	Brass	Nickel

#### Packing

Single or 100