


2.4mm Plug Straight PCB End Launch

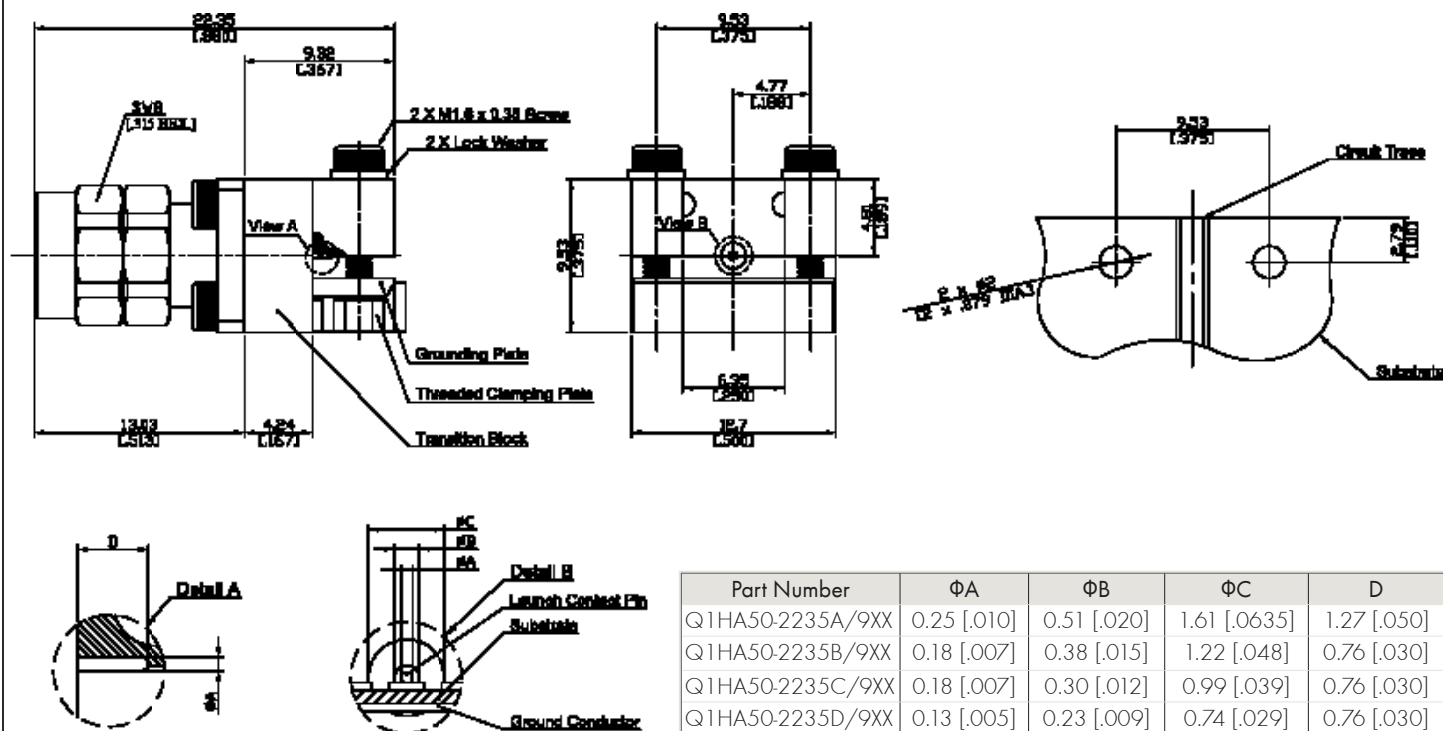

All dimensions are in mm [inch]

Interface

According to

IEEE Std 287-2007

Electrical Data

Impedance

50 Ω

Frequency

DC to 50 GHz

Mechanical Data

Board mounting type

End Launch

Environmental Data

Temperature range

-55°C to +80°C

RoHS

compliant

Material And Plating

Connector parts (RPC2.4 Connector)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling Nut	Stainless Steel	Passivated
Connector parts (Transition Block)	Material	Plating
Launch Pin	Beryllium Copper	Gold plating(Nickel underplated)
Transition Block	Brass	Copper-Tin-Zinc Alloy
Transition Block Insulator	PTFE	

Packing

Single

Related Document

Mounting Dimension

MD 108