



Technical Data Sheet

SMA Right Angle Panel Receptacle Jack (Coaxial End)

SMA2GFA59-1710A/91



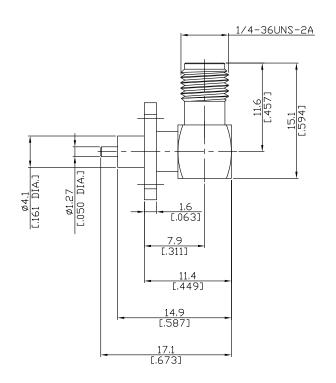

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface According to

L. L. .. (L. . .

MIL-C-39012; MIL-STD-348A/310

Electrical Data

Impedance Frequency 50 Ω

DC to 18 GHz

Mechanical Data

Coupling mechanisms Weight Screw-lock

0.0052 kg

Environmental Data

Temperature range RoHS -65°C to +165°C

compliant

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

Packing

Single or 100

Related Document

Mounting Dimension

MD71

ļ	The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only	Kev.:
	In the effort to improve our products, we reserve the right to make changes	
li	udged to be necessary.	19/11/1

rev	Rosnol RF/Microwave Technology www.rosnol.com ; info@rosnol.com	
Date: 9/11/10	Phone:+886-3-463-5095 Fax:+886-3-463-5952	

Page

1/1