



#### Technical Data Sheet

## SMA Right Angle Panel Receptacle Jack (Coaxial End)

## SMA2GFA59-1710A/9X



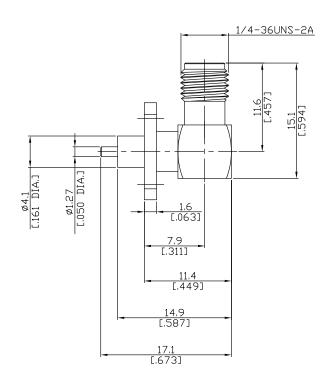

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

# Interface According to

lu sud u u

Electrical Data

Impedance Frequency 50 Ω

DC to 18 GHz

MIL-C-39012; MIL-STD-348A/310

Mechanical Data

Coupling mechanisms Weight Screw-lock 0.0052 kg

Environmental Data

Temperature range RoHS -65 °C to +165 °C compliant

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFF	

#### Packing

Single or 100

Related Document

Mounting Dimension MD71

The tacts and tigures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only	Kev.:-	Rosnol RF/N www.rosnol.d
In the effort to improve our products, we reserve the right to make changes	Date:	Phone:+886-
judged to be necessary.	19/11/10	Fax:+886-

Rosnol RF/Microwave Technology		Page
www.rosnol.com ; info@rosnol.com		
Phone:+886-3-463-5095		1/1
Fav:+886-3-463-5052		'/'