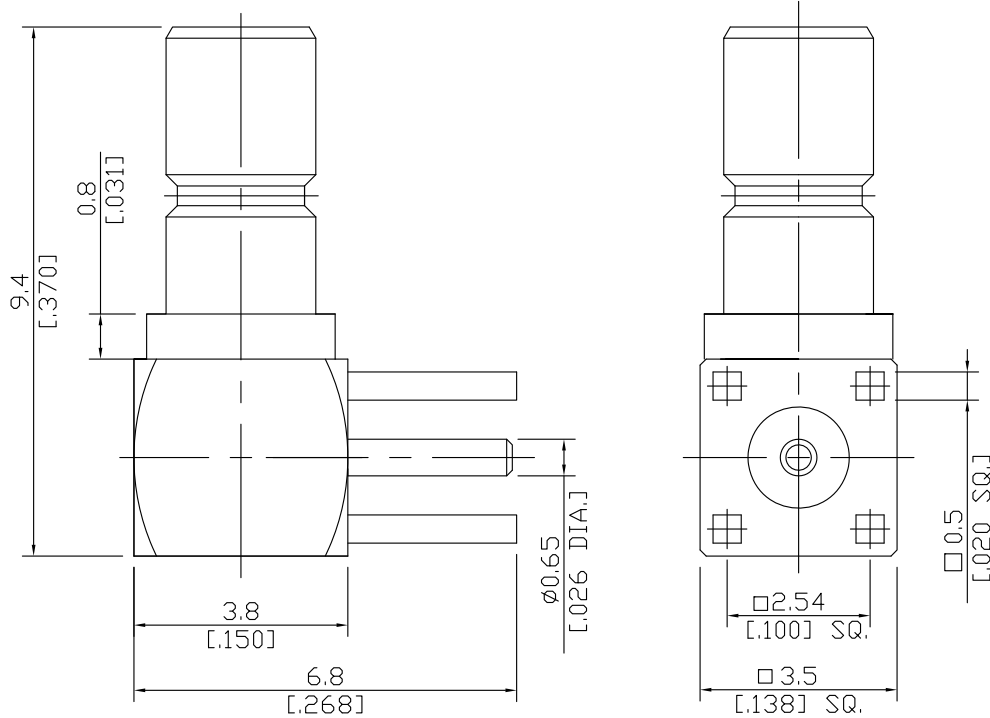


**SSMB Right Angle PCB Jack**
**SSMB2I59-0940A/11**


All dimensions are in mm [inch]

**Interface**

According to MIL-STD-348A/320

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency DC to 4 GHz

**Mechanical Data**

Coupling mechanisms Snap-lock  
 Board mounting type Through Holes  
 Weight 0.0005 kg

**Environmental Data**

Temperature range -65°C to +165°C  
 RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

**Packing**

Single or 100

**Related Document**

Mounting Dimension MD91