


## SMA Terminations Plug

T-A15-27G2WA/9XX

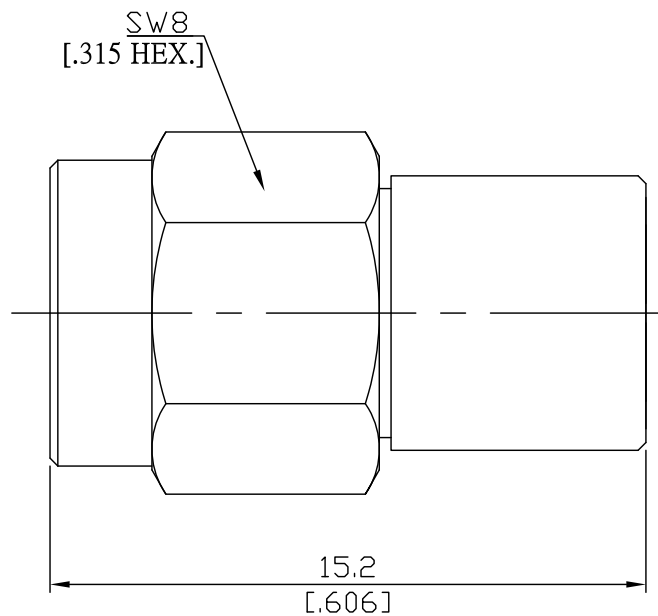

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to N/A

### Electrical Data

Impedance 50  $\Omega$   
 Interface frequency max. DC to 27 GHz  
 VSWR  $\leq 1.2$   
 Power rating (Watt) 2 W

### Mechanical Data

Coupling mechanisms Screw-lock  
 Weight 0.0053 kg

### Environmental Data

Temperature range -55°C to +125°C  
 RoHS compliant

### Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

### Packing

Single or 100