


BNC Straight Bulkhead Receptacle Jack
Solder End

BNC2FB50-2670A/H4

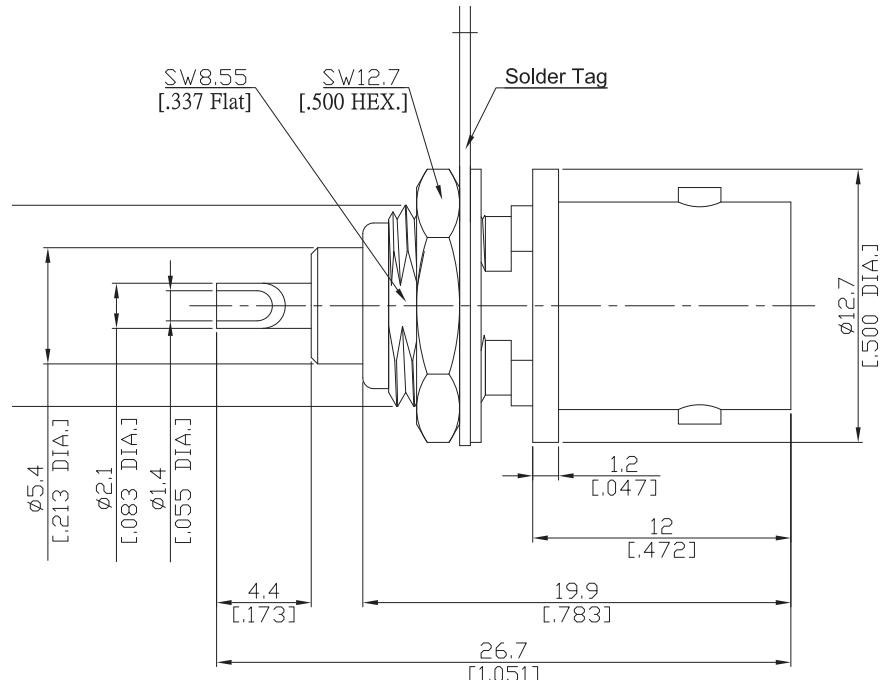

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

Electrical DataImpedance 50 Ω
Frequency DC to 4 GHz**Mechanical Data**Coupling mechanisms Bayonet-lock
Weight 0.0074 kg**Environmental Data**Temperature range -65 °C to +165 °C
RoHS compliant**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Solder tag	Brass	Copper-Tin-Zinc Alloy
Fastening nut	Brass	Copper-Tin-Zinc Alloy
Washer	Brass	Copper-Tin-Zinc Alloy

Packing

Single or 100

Related Document

Mounting Dimension MD18

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
19/11/10

Rosnol RF/Microwave Technology
www.rosnol.com ; info@rosnol.com
 Phone:+886-3-463-5095
 Fax:+886-3-463-5952

Page

1/1