


BNC Straight Bulkhead Receptacle Jack  
Solder End

BNC2FB50-2670C/H3

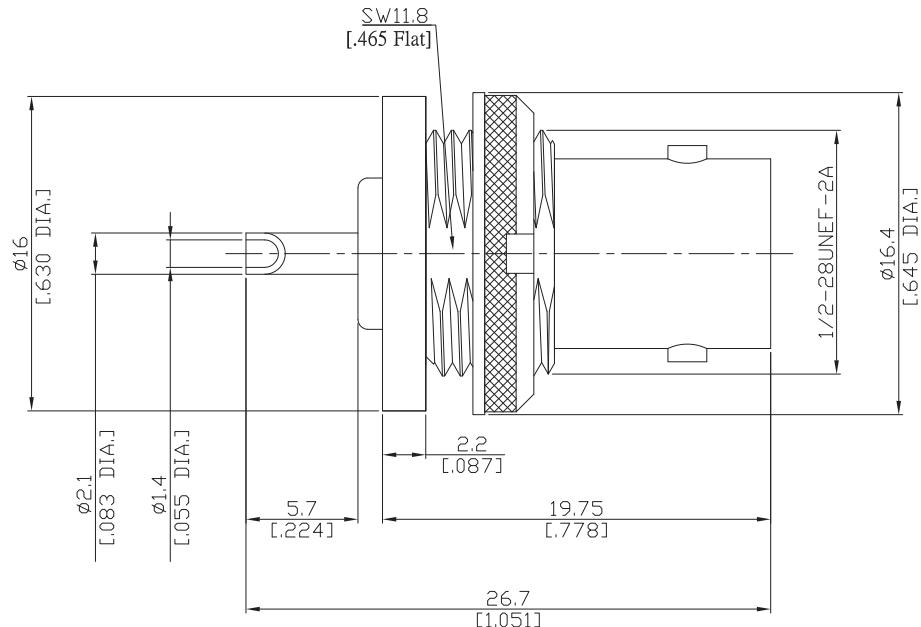

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 4 GHz

**Mechanical Data**

Coupling mechanisms

Bayonet-lock

Weight

0.0123 kg

**Environmental Data**

Temperature range

-65°C to +165°C

RoHS

compliant

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Fastening nut	Brass	Nickel
Washer	Brass	Nickel

**Packing**

Single or 100

**Related Document**

Mounting Dimension

MD7