



 BNC Straight Bulkhead Receptacle Jack  
 Solder End

BNC2FB50-2950A/H3

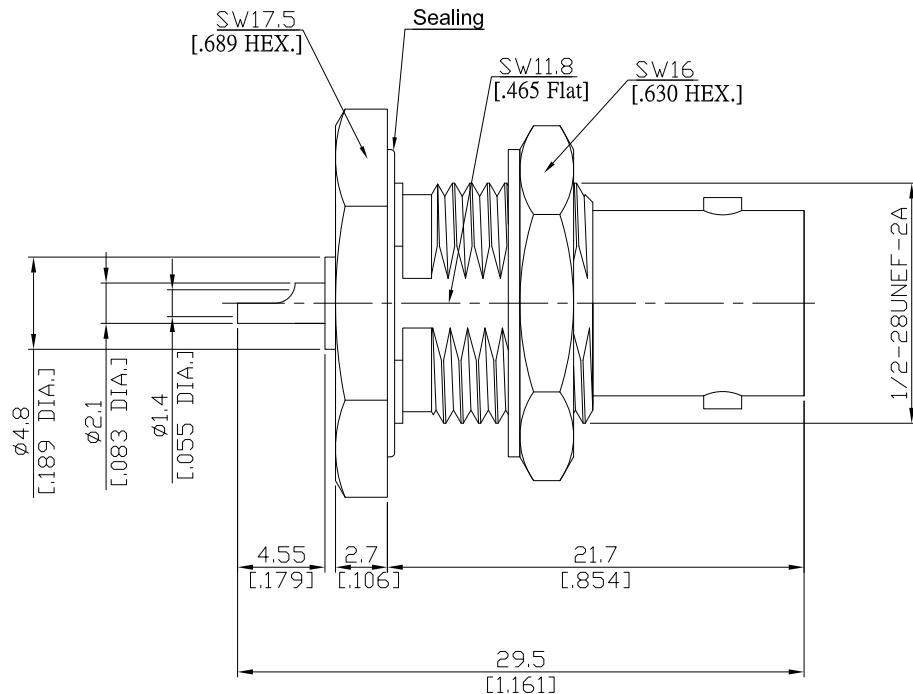

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 61169-8; MIL-C-39012; MIL-STD-348A/301

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 4 GHz

**Mechanical Data**

Coupling mechanisms

Bayonet-lock

Weight

0.0172 kg

**Environmental Data**

Temperature range

-65 °C to +165 °C

RoHS

compliant

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Brass	Nickel
Washer	Brass	Nickel

**Packing**

Single or 100

**Related Document**

Mounting Dimension

MD7

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:

Rosnol RF/Microwave Technology

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Date:

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0

Page

1/1