


BNC Straight Bulkhead Receptacle Jack  
Solder End

BNC2FB50-3700A/H3

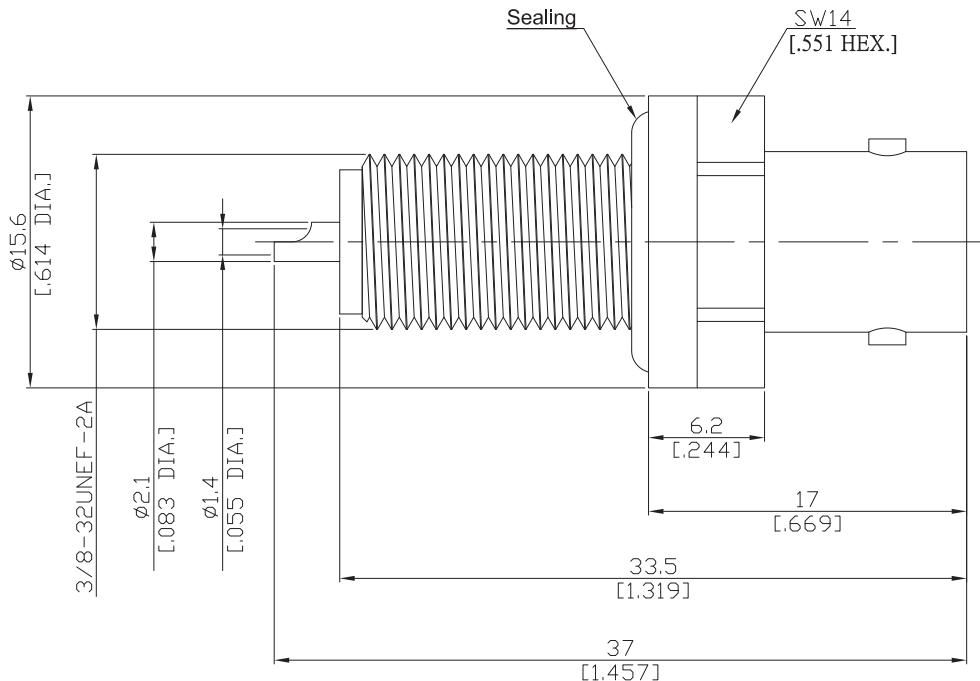

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 4 GHz

**Mechanical Data**

Coupling mechanisms

Bayonet-lock

Weight

0.0123 kg

**Environmental Data**

Temperature range

-65°C to +165°C

RoHS

compliant

**Material And Plating**

Piece Parts

Material

Plating

Centre contact

Phosphor Bronze

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Gasket

Silicone Rubber

**Packing**

Single or 100

**Related Document**

Mounting Dimension

MD114

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Rosnol RF/Microwave Technology

www.rosnol.com ; info@rosnol.com

Date: 19/11/10 Phone: +886-3-463-9059

Fax : +886-3-463-5952

Page

1/1