



**F-Type Straight Receptacle Jack Round Post
Round Flange 75 Ohm DC- 2 GHz**

F2FA70-2570A / H3

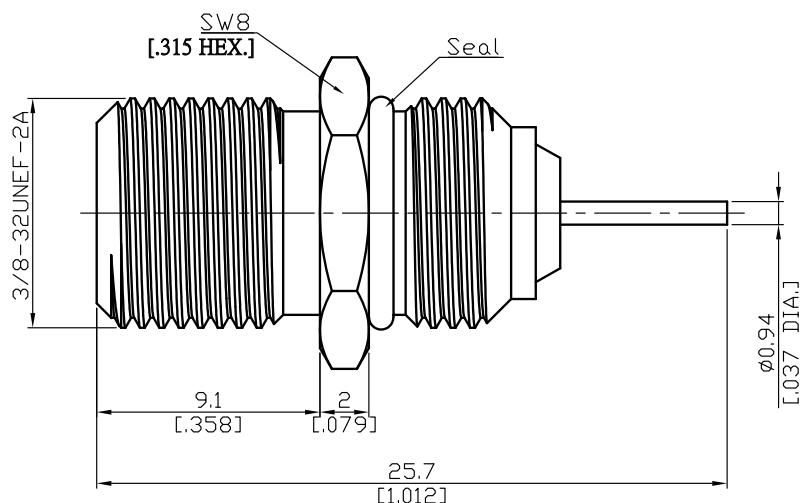

Mounting Dimensions



	mm		inch	
	Max.	Min.	Max.	Min.
A	9.7	9.5	.382	.374

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-24

Electrical Data

Impedance 75 Ω
Frequency DC to 2GHz

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	

Mechanical Data

Coupling mechanisms Screw-lock
Mating Cycles ≥ 500

Environmental Data

Temperature Range -60°C to +165°C
RoHS compliant

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
12/7/2020

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/1