


SMA jack (female) Straight Bulkhead Connector
Solder Attachment, Stub Terminal DC- 18 GHz VSWR 1.25

SMA2FA50-1710A / 91

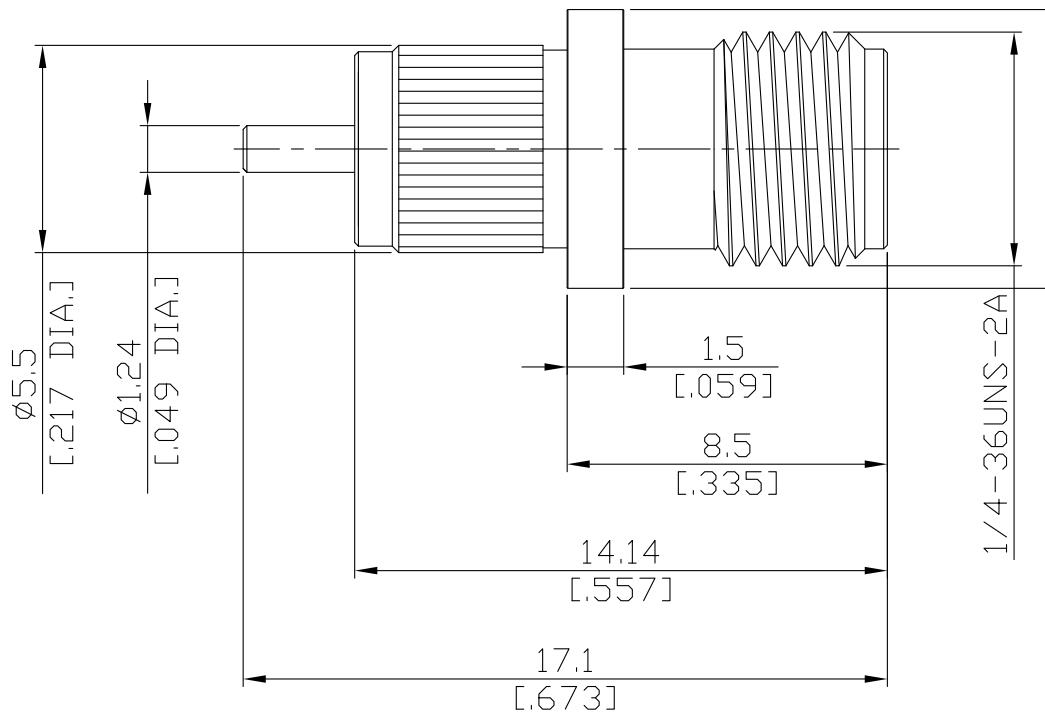

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

Electrical Dgta

Impedance

Frequency

VSWR (Return Loss)

Insertion loss

Insulation resistance

Center contd

Outer contact

Test voltage

Working voltage

Power hand

RF-leakage

Material And Plating		
Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

D

te:
/16/2021

Rosnl RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952

Page

1 / 2

SMA jack (female) Straight Bulkhead Connector
Solder Attachment, Stub Terminal DC- 18 GHz VSWR 1.25

SMA2FA50-1710A / 91

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivation	Mechanical
Centre Contact	Soldered
Terminal Type	Stub
Center contact captivation: axial	≥ 27 N
Coupling test torque	max. 0.6 Nm
Recommended torque	0.5 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100