


SMB(75 Ω)/SMZ/BT43 Straight Bulkhead
Receptacle Jack Solder End

SMB2FB70-1500A/11

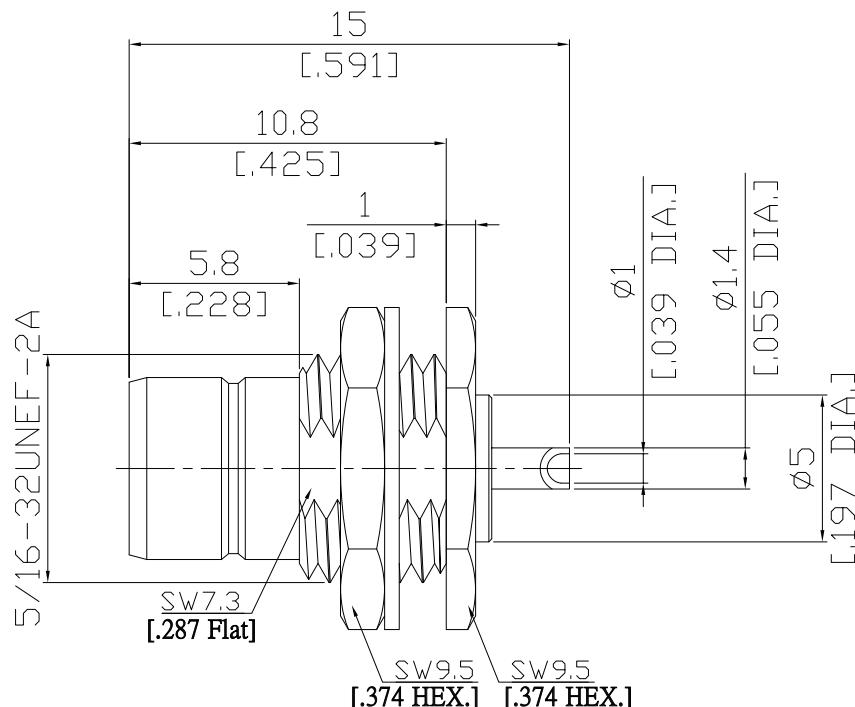

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to BT 43 (BS 9210 F0022)

Electrical Data

Impedance 75 Ω

Frequency DC to 4 GHz

VSWR (Return loss) ≤ 1.22 (≥ 20.1 dB)Insertion Loss $\leq 0.05 \times \sqrt{F}$ (GHz) dB**Mechanical Data**

Coupling mechanisms Snap-on

Weight N/A

Environmental Data

Temperature range -40°C to +100°C

RoHS compliant

Material And Plating

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Fastening nut	Brass	Gold plating(Nickel underplated)
Washer	Brass	Gold plating(Nickel underplated)

Packing

Single or 100

Related Document

Mounting Dimension MD153

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
19/11/10

Rosnol RF/Microwave Technology

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKKO

Page

1/1