



# Technical Data Sheet

# SMP Plug Thread-in Non-Hermetic Straight **Terminal**

# SMP1FA50-LD0668B/9X



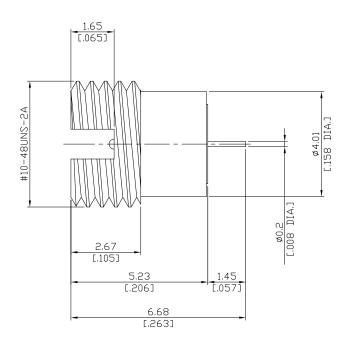

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

MIL-STD-348A/326 (Limited Detent)

## Electrical Data

Impedance Frequency

50 Ω

DC to 26.5 GHz

## Mechanical Data

Coupling mechanisms

Snap-on N/A

Weight

## Environmental Data

Temperature range RoHS

-65°C to +165°C

compliant

## Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

### Packing

Single or 100

### Related Document

Mounting Dimension

The tacts and tigures herein are carefully compiled to the best of our	KOV	Kos
knowledge, but they are intended for general informational purposes only		ww
In the effort to improve our products, we reserve the right to make changes	Date:	Pho
judged to be necessary.	19/11/10	F

CV	Rosnol RF/Microwave Technology		
	www.rosnol.com ; info@rosnol.com		
	Phone:+886-3-463-5095		
1/10	Fax:+886-3-463-5952		