


DIN 1.0-2.3(Male) Right-Angle  
Cable Crimp Plug (Snap-on)

1023-1C79-ST212A/144

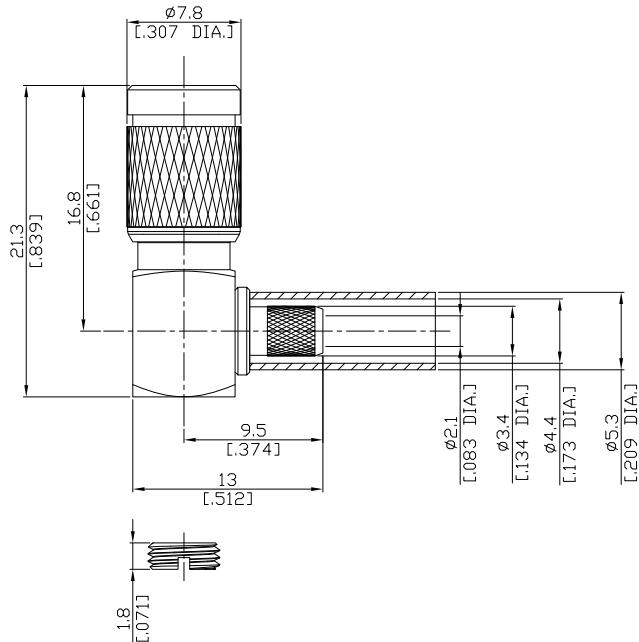

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

According to

IEC 61169-29 (snap-on)

## Electrical Data

Impedance

75 Ω

Frequency

DC to 2 GHz

- Limitations are possible due to the used cable type and manufacturing method -

## Mechanical Data

Coupling mechanisms

Snap-on

Centre contact

Soldered

Cable entry

Crimped

Mating cycles

≥ 500 matings

## Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

## Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Crimp ferrules	Brass	Copper-Tin-Zinc Alloy

## Suitable Cables

ST-212

## Packing

Single or 100