


10-32 Jack (Female) Connector, Cable Entry: Clamp
Center Conductor: Solder Attachment for RG178, RG196 DC-2GHz

1032-2D50-G178B / H1

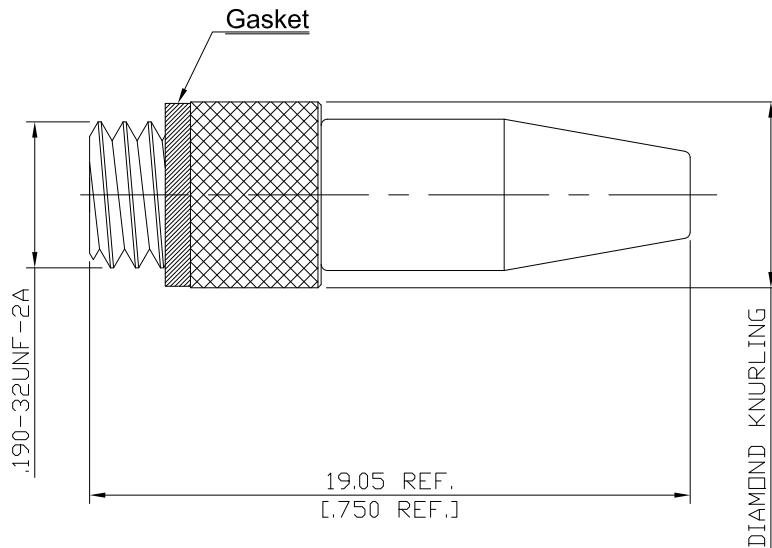

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to N/A

Electrical DataImpedance 50 Ω
Frequency DC to 2 GHz**Material And Plating**

Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Gasket	Silicone Rubber	Passivated

Mechanical DataCoupling Mechanisms Screw-Lock
Mating Cycles ≥ 500
Centre Contact Soldered
Cable Entry Clamp**Environmental Data**Temperature Range -55°C to +155°C
RoHS compliant**Packing**

Single or 100

Weight

N/A