


BNC(Male) Straight Cable Plug

BNC1C50-R240A/144

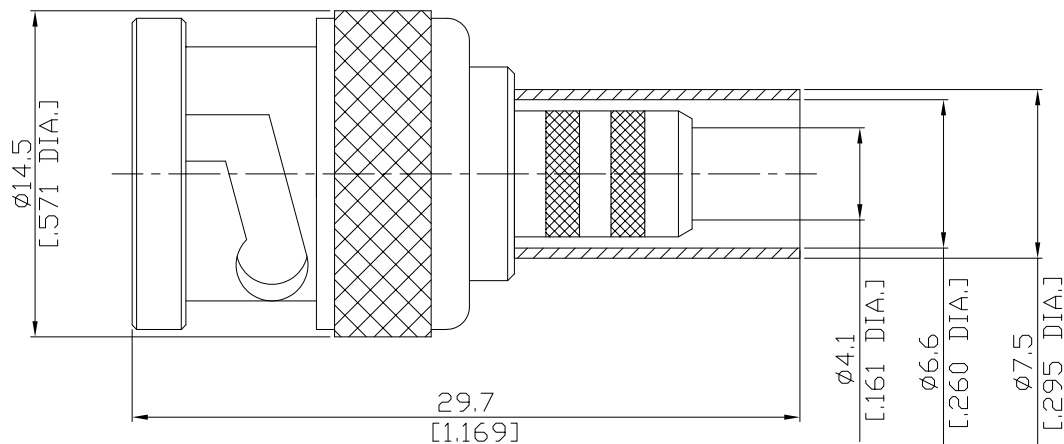

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-8; MIL-STD-348A/301

Electrical Data

Impedance: 50 Ω
 Frequency: DC to 4 GHz
 Frequency range: ≤ 1.20 (≥ 20.83 dB)
 Return loss: $\leq 0.05 \times \sqrt{F}$ (GHz) dB

- Limitations are possible due to the used cable type and manufacturing process -

Mechanical Data

Coupling mechanisms: Bayonet-lock
 Centre contact: Soldered or Crimped
 Cable entry: Crimped

Environmental Data

Temperature range: -65°C to +165°C
 RoHS: compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Crimp ferrules	Brass	Copper-Tin-Zinc Alloy

Suitable Cables

LMR 240, BELDEN H155, RNL-240


Packing

Single or 100

BNC(Male) Straight Cable Plug

BNC1C50-R240A/144

Recommended Cable Stripping Dimensions

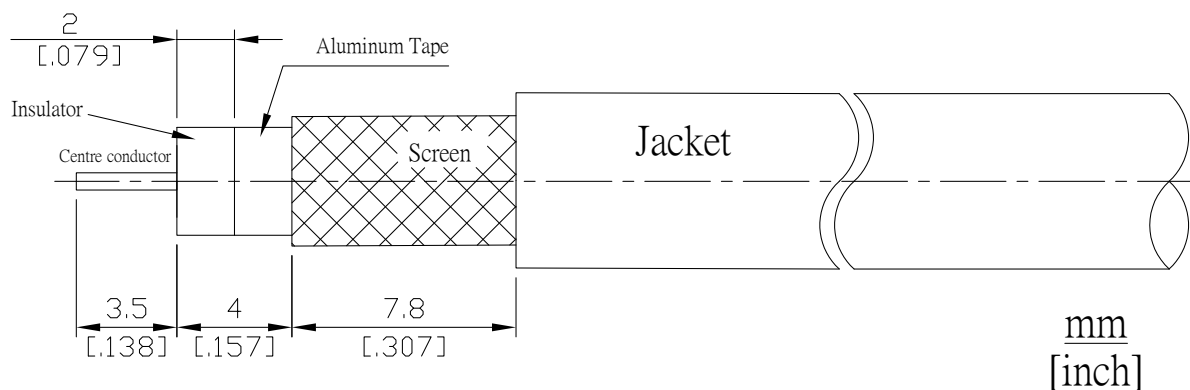

Crimp Dimensions [HEX]

Crimp ferrule	6.48mm [.255 inch]
Centre contact	1.73mm [.068 inch]