


**BNC Jack (Female) Connector Panel 4 Hole Cable Crimp, Pin Crimp or Solder Attachment
for RG55, RG142, RG223, RG400 DC-4GHz VSWR1.3**

BNC2CBF50-G142A / H3

**RECOMMEND
CABLE STRIPPING DIMENSIONS**

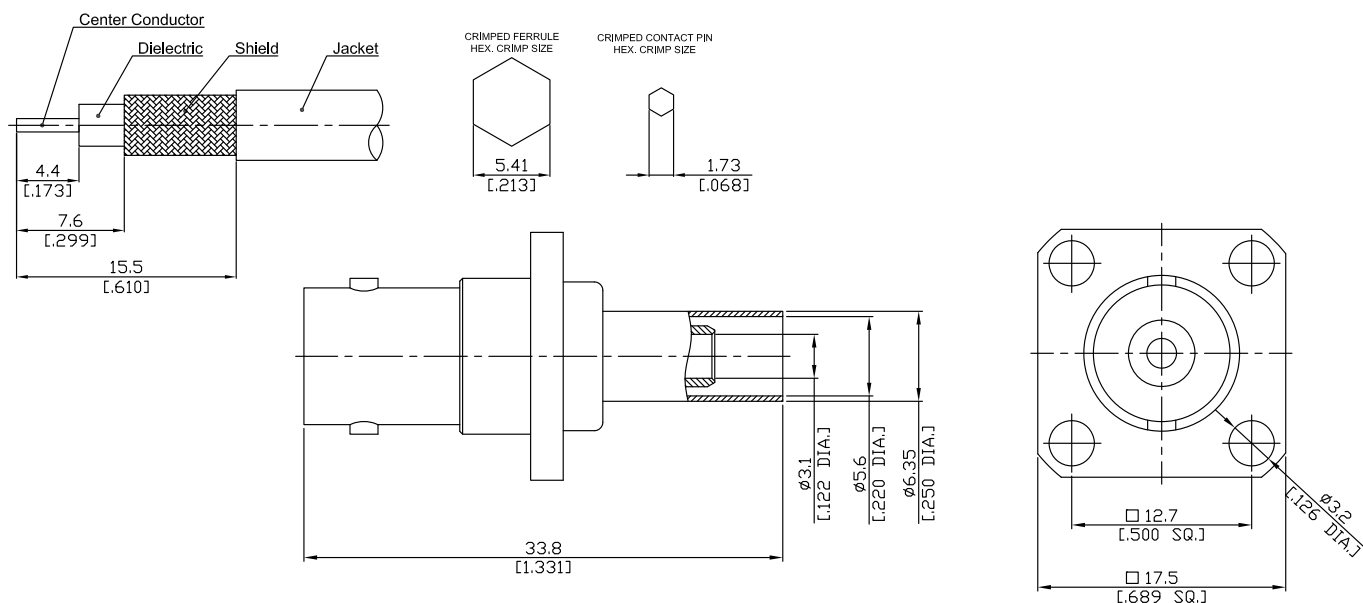

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-8

MIL-STD-348B/301

Electrical Data

Impedance	50 Ω
Frequency	DC to 4 GHz
VSWR (Return Loss)	≤ 1.30 (≥ 17.69 dB)
Insertion Loss	≤ 0.05 dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 1.5 mΩ
Outer Contact Resistance	≤ 1.0 mΩ
Test Voltage	1500 V rms
Working Voltage	400 V rms
Power handling (at 20 °C, sea level)	≤ 80 W @ 2 GHz

- Limitations are possible due to the used cable type -

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Brass	Nickel
Insulator	PTFE	
Ferrule	Brass	Nickel

**BNC Jack (Female) Connector Panel 4 Hole Cable Crimp, Pin Crimp or Solder Attachment
for RG55, RG142, RG223, RG400 DC-4GHz VSWR1.3**

BNC2CBF50-G142A / H3

Mechanical Data

Coupling Mechanisms	Bayonet-Lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 15 N
Centre Contact	Soldered or Crimped
Cable Entry	Crimped

Environmental Data

Temperature Range	-55°C to +155°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Suitable Cables

RG55, RG142, RG223, RG400

Packing

Single or 100