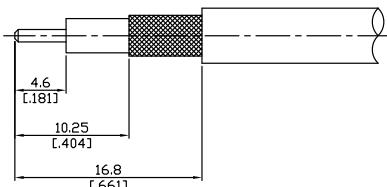
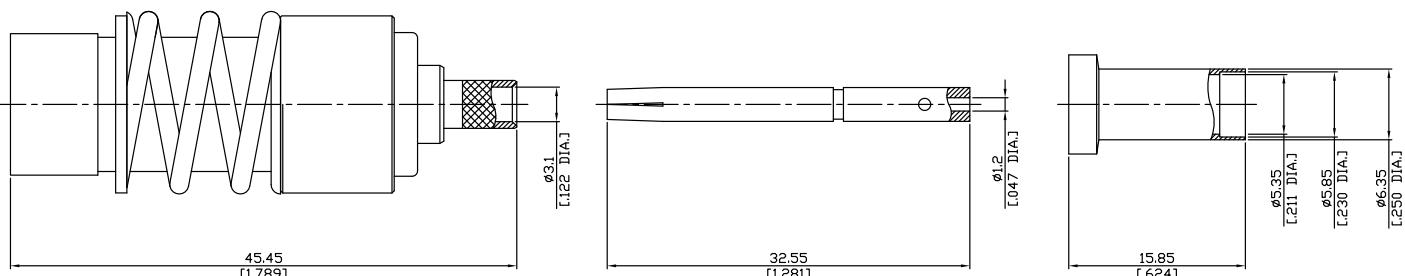


C Quick-Fit Jack (Female) Connector Crimp/Solder or Crimp Contact Attachment  
 for LMR-200, RNL-200; DC-8GHz

**CQ2C50-R200A / H1**

 RECOMMENDED CABLE  
 STRIPPING DIMENSIONS


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

MIL-STD-348B/302

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 8 GHz

*- Limitations are possible due to the used cable type -*
**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Spring	Carbon Steel	Nickel
Ferrule	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)

**Mechanical Data**

Coupling mechanisms

Quick-Fit

Mating Cycles

≥ 500

**Environmental Data**

Temperature Range

-65 °C to +165 °C

RoHS

compliant

**Suitable Cables**

Times Microwave LMR-200, Rosnol RNL-200

**Packing**

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

 Rev.:-  

 Rosnol RF/Microwave Technology Co., Ltd.  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

 Date:  
 12/7/2020

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/1