


LC Plug Male Connector Clamp/Solder Attachment For RG-393A

LC1D50-G393A / 133

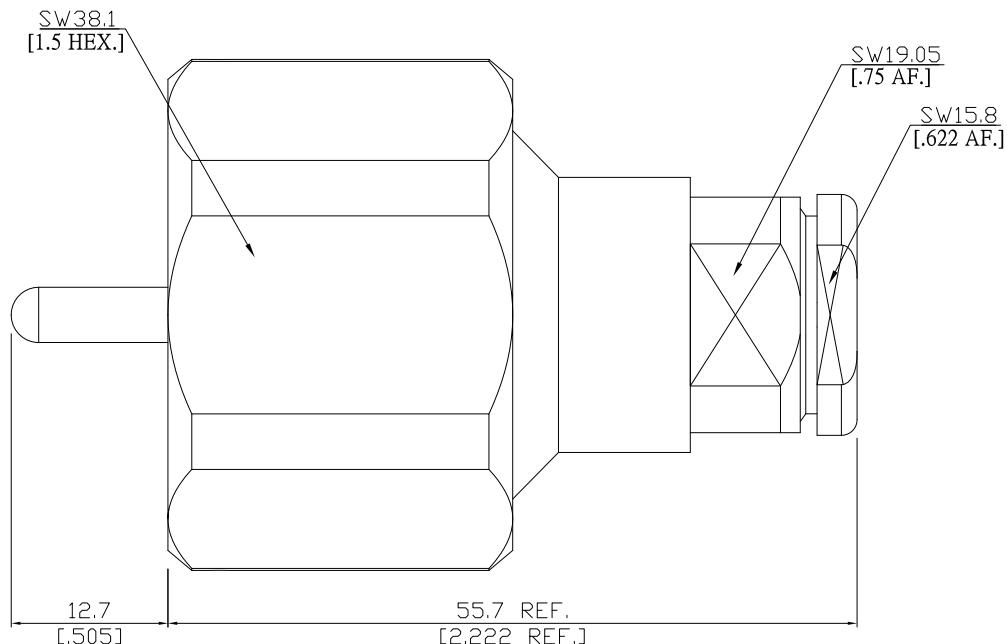

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-STD-348B/315

Electrical Data

Impedance	50 Ω
Frequency	DC to 1 GHz
Insulation Resistance	≥ 5 GΩ
Operating Voltage(DC)	5000 V dc
Dielectric Withstanding voltage	5000 V rms

Material And Plating

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Centre Contact	Soldered

Environmental Data

Temperature Range	-65 °C to +165 °C
RoHS	compliant

Packing

Single or 100