


Mini-BNC Straight Crimp Plug 75 Ohm
DC- 1GHz VSWR1.3

MB1C70-G059A / 133

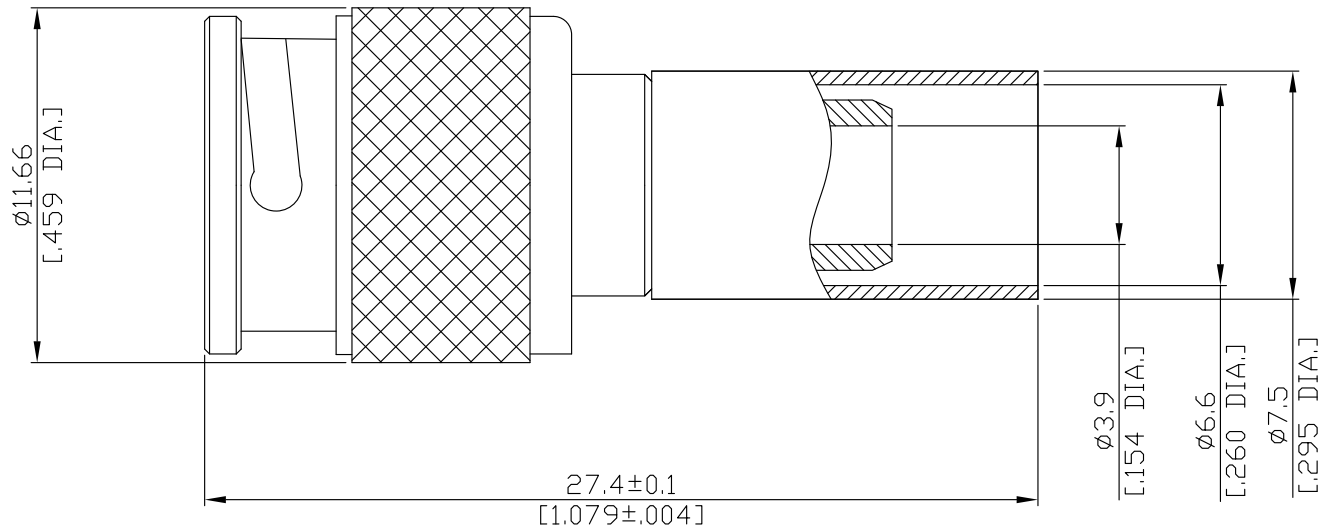

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-23, ; MIL-STD-348A/301

Electrical Data

Impedance 75 Ω
Frequency DC to 1 GHz
VSWR (Return Loss) ≤ 1.3 (≥ 17.7 dB)

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Brass	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Brass	Nickel
Coupling Nut	Brass	Nickel
Crimp ferrules	Brass	Nickel

Mini-BNC Straight Crimp Plug 75 Ohm
DC- 1GHz VSWR1.3

MB1C70-G059A / 133

Mechanical Data

Coupling mechanisms	Bayonet-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 27 N

Environmental Data

Temperature Range	-40°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100