


Mini BNC Straight Cable Plug

MB1C70-G316A/133

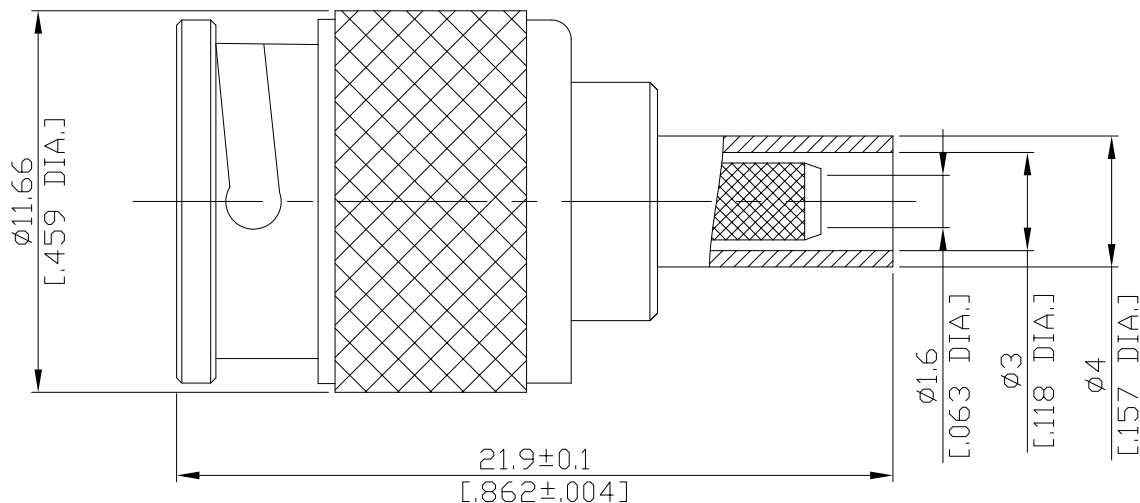

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to N/A

Electrical Data

Impedance 75 Ω
Frequency DC to 4 GHz

- Limitations are possible due to the used cable type and manufacturing process -

Mechanical Data

Coupling mechanisms Bayonet-lock
Centre contact Soldered
Cable entry Crimped

Environmental Data

Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel
Crimp ferrules	Brass	Nickel

Suitable Cables

RG 174, RG 179, RG 187, RG 188, RG 316


Packing

Single or 100

Mini BNC Straight Cable Plug

MB1C70-G316A/133

Recommended Cable Stripping Dimensions

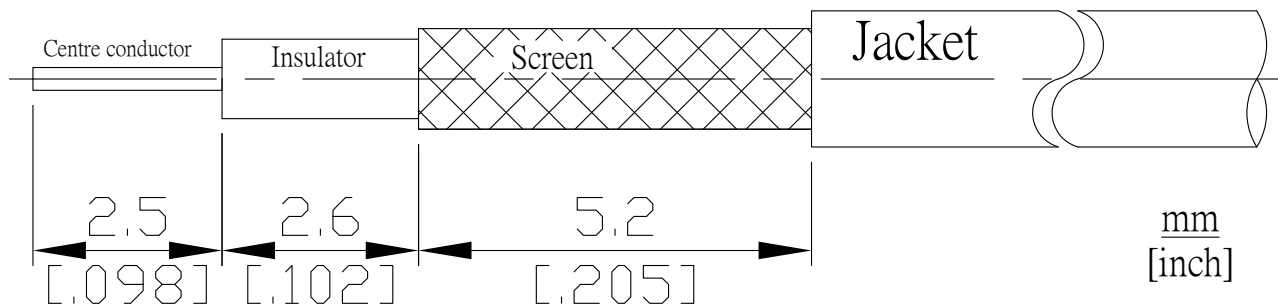

Crimp Dimensions [HEX]

Crimp ferrule

5.41mm [.213 inch]