


Mini BNC Straight Cable Plug

MB1C70-G316A/144

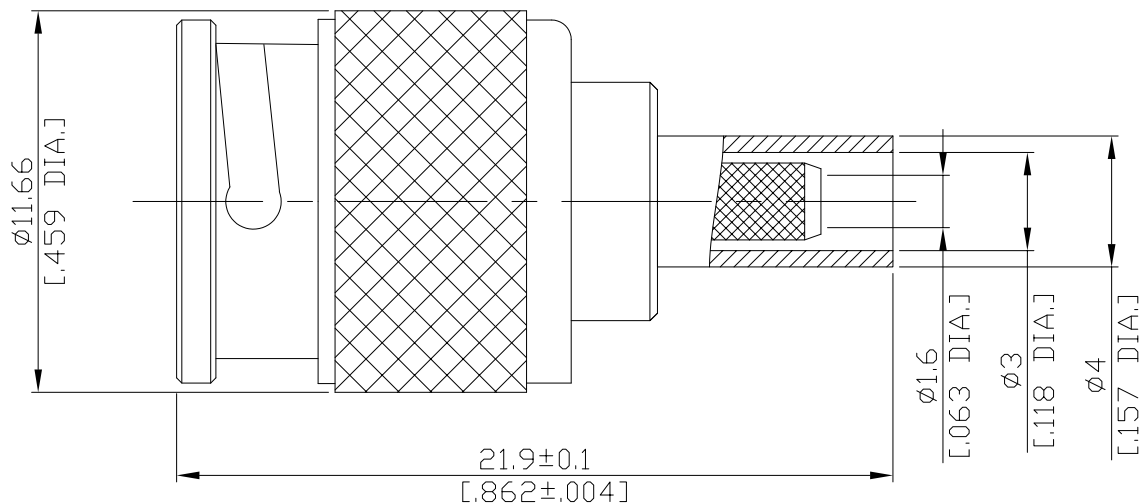

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to N/A

Electrical Data

Impedance 75 Ω

Frequency DC to 4 GHz

- Limitations are possible due to the used cable type and manufacturing process -

Mechanical Data

Coupling mechanisms Bayonet-lock

Centre contact Soldered

Cable entry Crimped

Environmental Data

Temperature range -65°C to +165°C

RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Crimp ferrules	Brass	Copper-Tin-Zinc Alloy

Suitable Cables

RG 174, RG 179, RG 187, RG 188, RG 316


Packing

Single or 100

Mini BNC Straight Cable Plug

MB1C70-G316A/144

Recommended Cable Stripping Dimensions

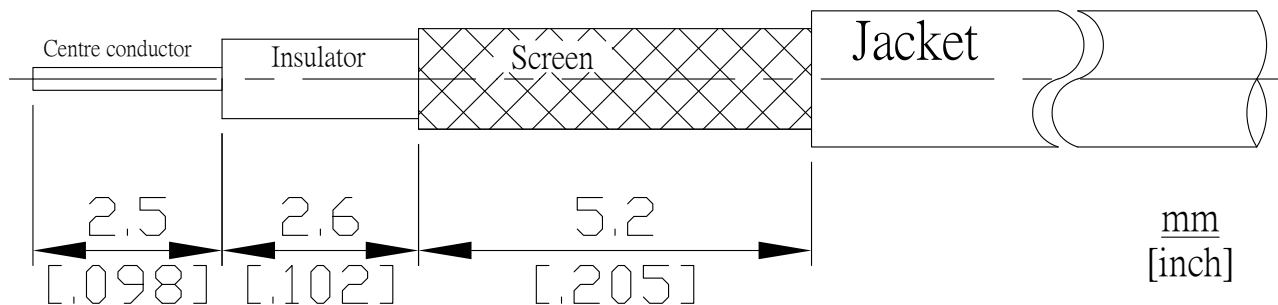

Crimp Dimensions [HEX]

Crimp ferrule

5.41mm [.213 inch]