


N Straight Cable Plug

N1C50-G213A/H33

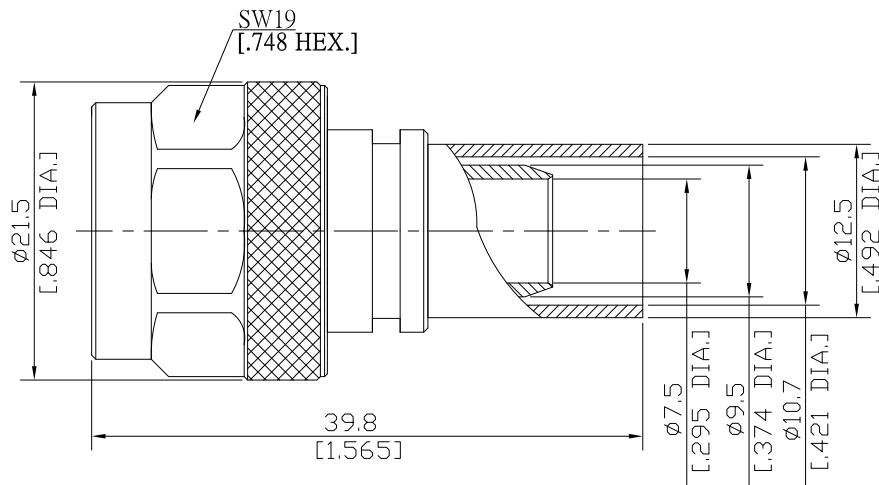

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-C-39012; MIL-STD-348A/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

*- Limitations are possible due to the used cable type and manufacturing process -***Mechanical Data**

Coupling mechanisms

Screw-lock

Centre contact

Soldered

Cable entry

Crimped

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating**Connector parts****Material****Plating**

Centre contact

Phosphor Bronze

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Nickel

Crimp ferrules

Brass

Nickel

Suitable Cables

RG-213

Packing

Single or 100