


N Right Angle Cable Plug

N1D59-G214B/144

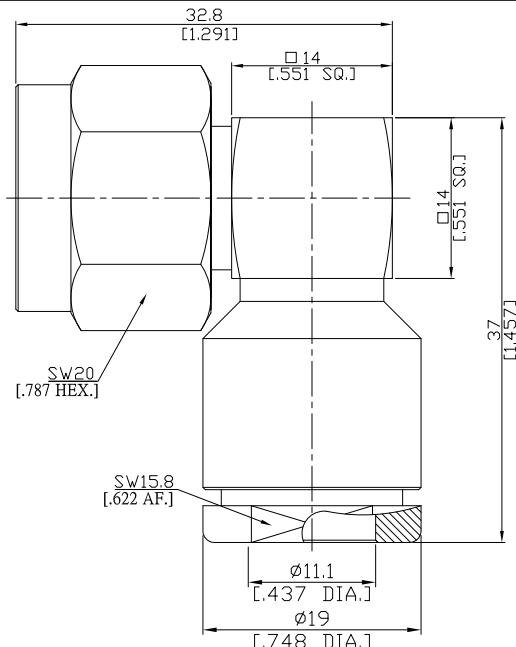

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-C-39012; MIL-STD-348A/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

 ≤ 1.28 (≥ 18.22 dB)

Insertion Loss

 ≤ $0.05 \times \sqrt{f}$ (GHz) dB

- Limitations are possible due to the used cable type and manufacturing process -

Mechanical Data

Coupling mechanisms

Screw-lock

Centre contact

Soldered

Cable entry

Clamp

Environmental Data

Temperature range

-65 °C to +165 °C

RoHS

compliant

Material And Plating

Connector parts

Material

Plating

Centre contact

Brass

Gold plating (Nickel underplated)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Copper-Tin-Zinc Alloy

Suitable Cables

RG-214

Packing

Single or 100