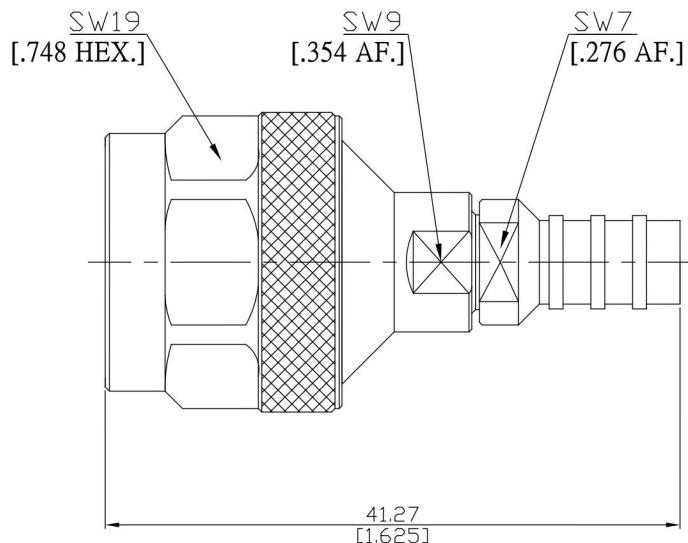


Precision N Straight Cable Plug
N1K50-SF142A/9XX


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348A/402

Electrical Data

Impedance

50 Ω

Frequency

DC to 12 GHz

VSWR (Return Loss)

 ≤ 1.20 (\geq 20.83 dB)

Insertion Loss

 ≤ $0.05 \times \sqrt{f}$ (GHz) dB

- Limitations are possible due to the used cable type and manufacturing process -
Mechanical Data

Coupling mechanisms

Screw-lock

Centre contact

Soldered

Cable entry

Solder Clamp

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material and Plating

Connector Parts

Material

Plating

Centre contact

Beryllium Copper

Gold plating(Nickel underplated)

Body

Stainless Steel

Passivated

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Stainless Steel

Passivated

Suitable Cables

SB142, SF-142

Packing

Single or 100