


N Straight Cable Jack

N2C70-G011A/H3

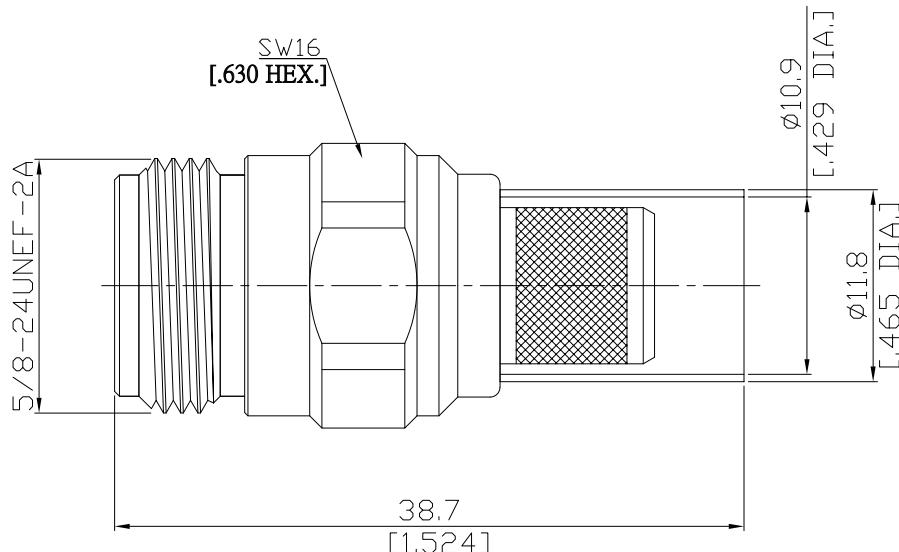

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-STD-348A/331-1

Electrical Data

Impedance 75 Ω

Frequency DC to 1.5 GHz

VSWR (Return Loss) ≤ 1.22 (≥ 20.08 dB)

Insertion Loss ≤ 0.05 dB

- Digressions are possible due to the used cable type or manufacturing process -
Mechanical Data

Coupling mechanisms Screw-lock

Centre contact Soldered

Cable entry Crimped

Environmental Data

Temperature range -65 °C to +165 °C

RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Crimp ferrules	Brass	Nickel

Suitable Cables

RG-11

Packing

Single or 100