



N Jack (Female) Straight Bulkhead Connector Crimp / Contact Pin Solder
Attachment for LMR-400, ROSNOL RNL-400, DC-6GHz, VSWR 1.3

N2CA50-R400A / H4

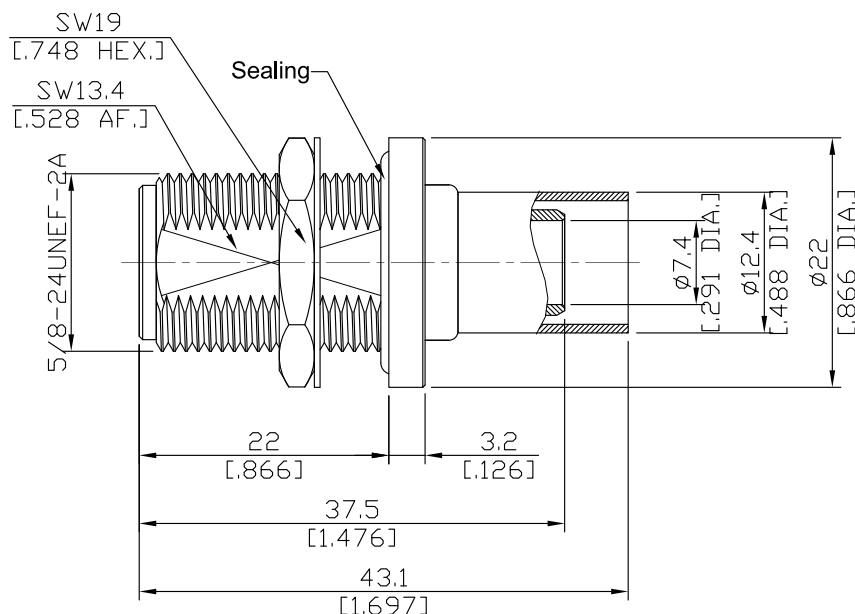

Mounting Dimension



	mm		inch	
	Max.	Min.	Max.	Min.
A	16.1	16	.634	.630
B	13.7	13.6	.539	.535

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.30 (≥ 17.69 dB)

Insertion Loss

≤ 0.05 dB

Insulation Resistance

≥ 5 G Ω

Center Contact Resistance

≤ 1 m Ω

Outer Contact Resistance

≤ 0.25 m Ω

Working Voltage

500 V rms

Power Handling (at 20 °C, sea level, VSWR 1.0)

≤ 1000 W @ 1 GHz

≤ 700 W @ 2 GHz

-VSWR in application depends decisive on cable assembly process-

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Crimp Ferrules	Brass	Copper-Tin-Zinc Alloy
Washer	Brass	Copper-Tin-Zinc Alloy
Fastening Nut	Brass	Copper-Tin-Zinc Alloy

**N Jack (Female) Straight Bulkhead Connector Crimp / Contact Pin Solder
Attachment for LMR-400, ROSNOL RNL-400, DC-6GHz, VSWR 1.3**

N2CA50-R400A / H4

Mechanical Data

Coupling Mechanisms	Screw-On
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	1.0 Nm
Centre Contact	Soldered
Cable Entry	Crimped

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	Compliant

Suitable Cables

LMR-400; RNL-400; Belden 7810A, 8214, 9913; Ecoflex 10

Packing

Single or 100