


N Straight Cable Jack

N2D50-G058A/H3

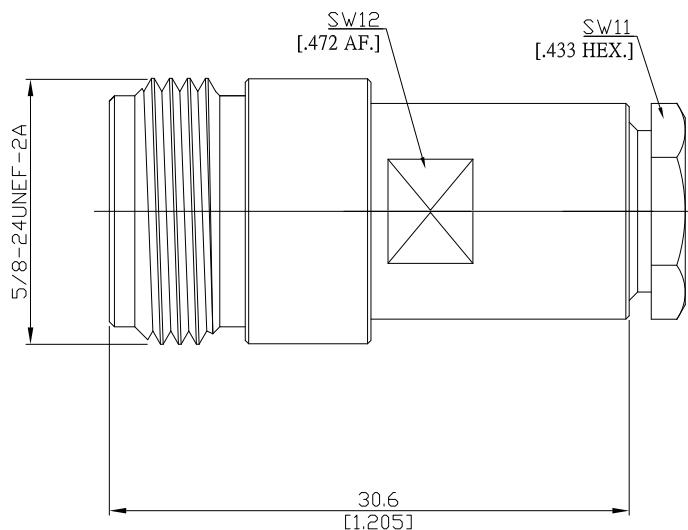

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012;MIL-STD-348A/304

Electrical Data

Impedance 50 Ω
Frequency DC to 11 GHz
VSWR (Return Loss) ≤ 1.20 (≥ 20.8 dB)
Insertion Loss ≤ 0.05
Working voltage (at sea level) 140 V rms

Mechanical Data

Coupling mechanisms Screw-lock
Centre contact Soldered
Cable entry Clamp

Environmental Data

Temperature range -65 °C to +165 °C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	

Suitable Cables

RG-58C, RG-303

Packing

Single or 100