


N Jack (Female) Connector, 4 Hole Flange Mount, Solder Clamp Attachment,
18.25 mm (.719 inch) Hole Spacing, for .141, DC - 11 GHz, VSWR 1.2

N2KBF50-0141A1 / 80

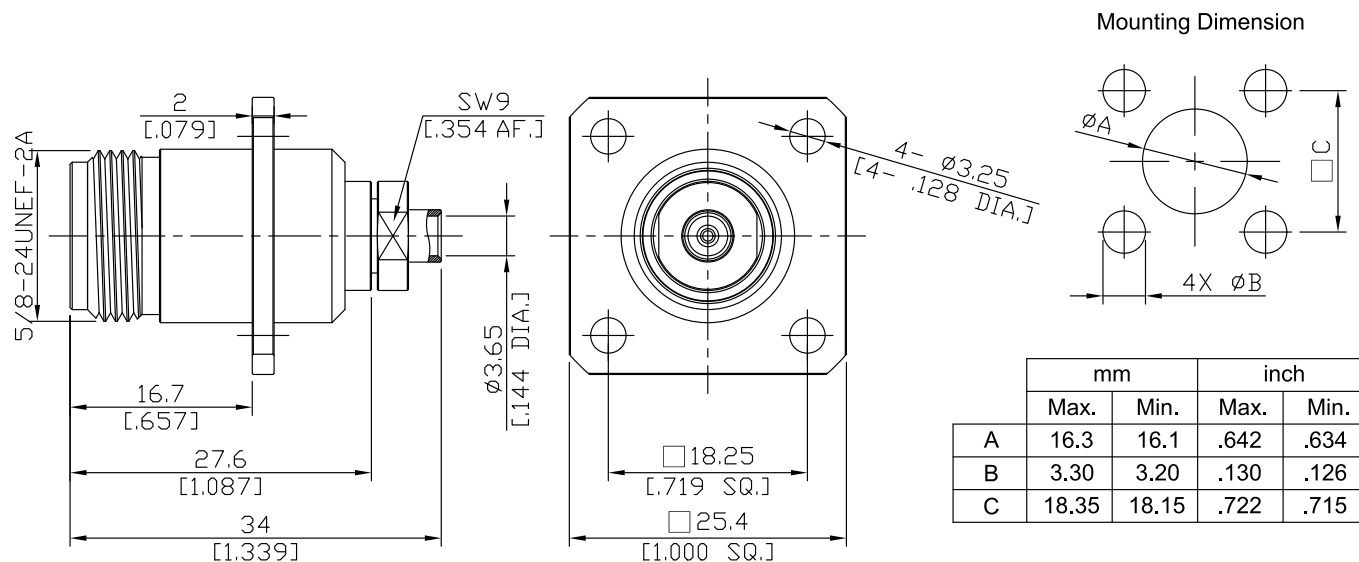

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance	50 Ω
Frequency	DC to 11 GHz
VSWR (Return Loss)	≤ 1.2 (≥ 20.83 dB)
Insertion Loss	$\leq 0.05 \times \sqrt{F}$ (GHz) dB
Insulation Resistance	$\geq 5 \times 10^3$ M Ω
Center Contact Resistance	≤ 1 m Ω
Outer Contact Resistance	≤ 0.25 m Ω
Working voltage	500 V rms
Power handling	1000 W @ 1 GHz
RF-leakage	≥ 128 dB up to 1 GHz

700 W @ 2 GHz

-VSWR in application depends decisive on cable assembly process-

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Silver
Body	Brass	Silver
Insulator	PTFE	

N Jack (Female) Connector, 4 Hole Flange Mount, Solder Clamp Attachment,
18.25 mm (.719 inch) Hole Spacing, for .141, DC - 11 GHz, VSWR 1.2

N2KBF50-0141A1 / 80

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	min. 500
Centre Contact	Soldered
Cable entry	Solder Clamp
Center Contact Captivation: axial	≥ 28 N
radial	≥ 3 Ncm
Coupling Test Torque	max. 1.7 Nm
Recommended Torque	1.0 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Suitable Cables

.141 RSF, .141 RSR, RG402, EF402

Packing

Single or 100