


Precision TNC Plug (Male) Cable Connector Direct Solder Attachment for RG405,
.085, .086, SS405 Cable DC-18 GHz VSWR 1.2

PCT1E50-EZ085A / 9XX

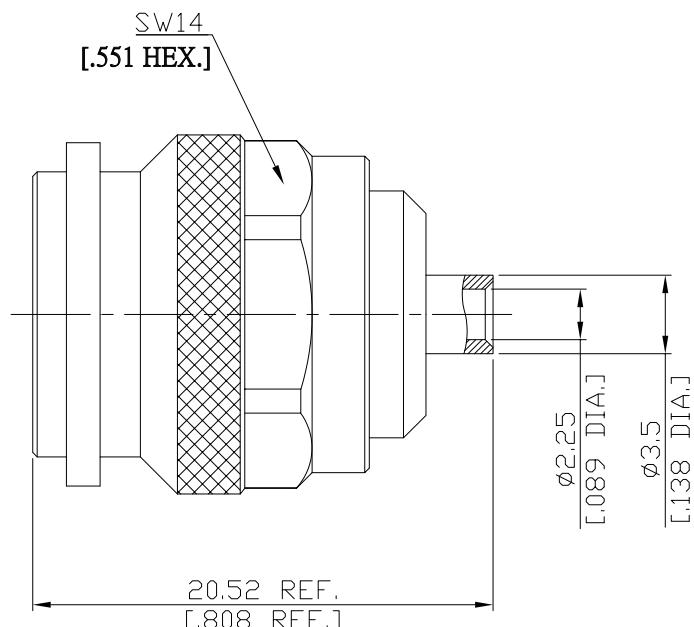

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-26

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 1.5 mΩ

Outer Contact Resistance

≤ 1 mΩ

Test Voltage (at sea level)

1500 V rms

Working Voltage (at sea level)

500 V rms

Power Handling (at 20 °C, sea level, VSWR 1.0)

≤ 80 W @ 2 GHz

- limitations are possible due to the used cable type -

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Barrel	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:
10/7/2018

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

Precision TNC Plug (Male) Cable Connector Direct Solder Attachment for RG405,
.085, .086, SS405 Cable DC-18 GHz VSWR 1.2

PCT1E50-EZ085A / 9XX

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Weight	N/A
Coupling Test Torque	1.7 Nm max.
Recommended Torque	1.36 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture Resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Suitable Cables

.085, .086, RG405, SS405

Packing

Single or 100