


SMA Straight Cable Jack

SMA2C50-G058A/94

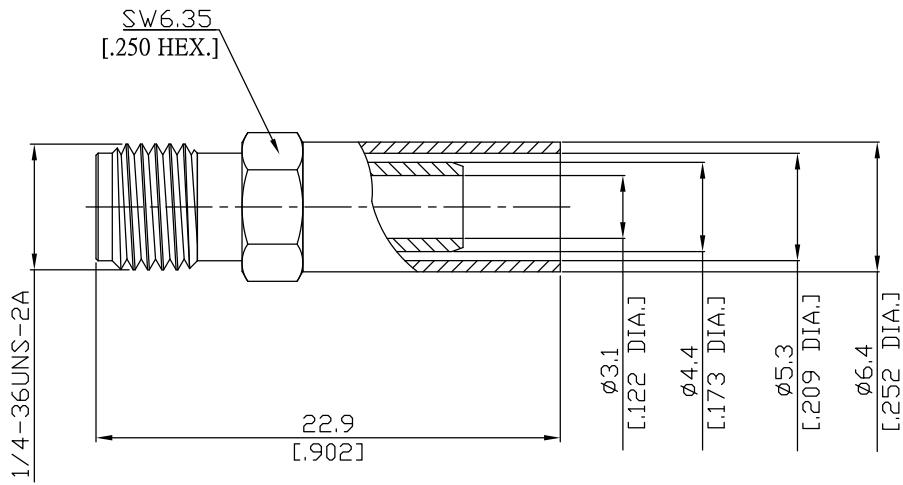

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance 50 Ω

Frequency DC to 6 GHz

- Limitations are possible due to the used cable type and manufacturing process -
Mechanical Data

Coupling mechanisms Screw-lock

Centre contact Soldered or Crimped

Cable entry Crimped

Environmental Data

Temperature range -65°C to +165°C

RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Crimp ferrules	Brass	Copper-Tin-Zinc Alloy

Suitable Cables

RG 58, RG 58A, RG 58C, RG 141, RG 303, BELDEN 7806A, BELDEN 9907, LMR 195, RNL-195

Packing


Single, 5-pack, or 100



SMA Straight Cable Jack

SMA2C50-G058A/94

Recommended Cable Stripping Dimensions

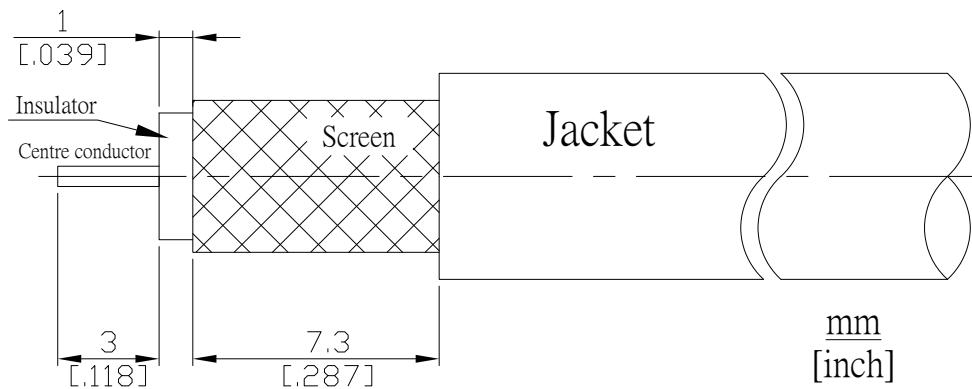

Crimp Dimensions [HEX]

Crimp ferrule 5.41mm [.213 inch]
Centre contact 1.73mm [.068 inch]