


SMPM Jack (Female) Snap-On Connector Solder Attachment  
for .085, .086, RG405, EF085 DC-40 GHz VSWR 1.40

## SMPM2E50-EZ0085A / 99

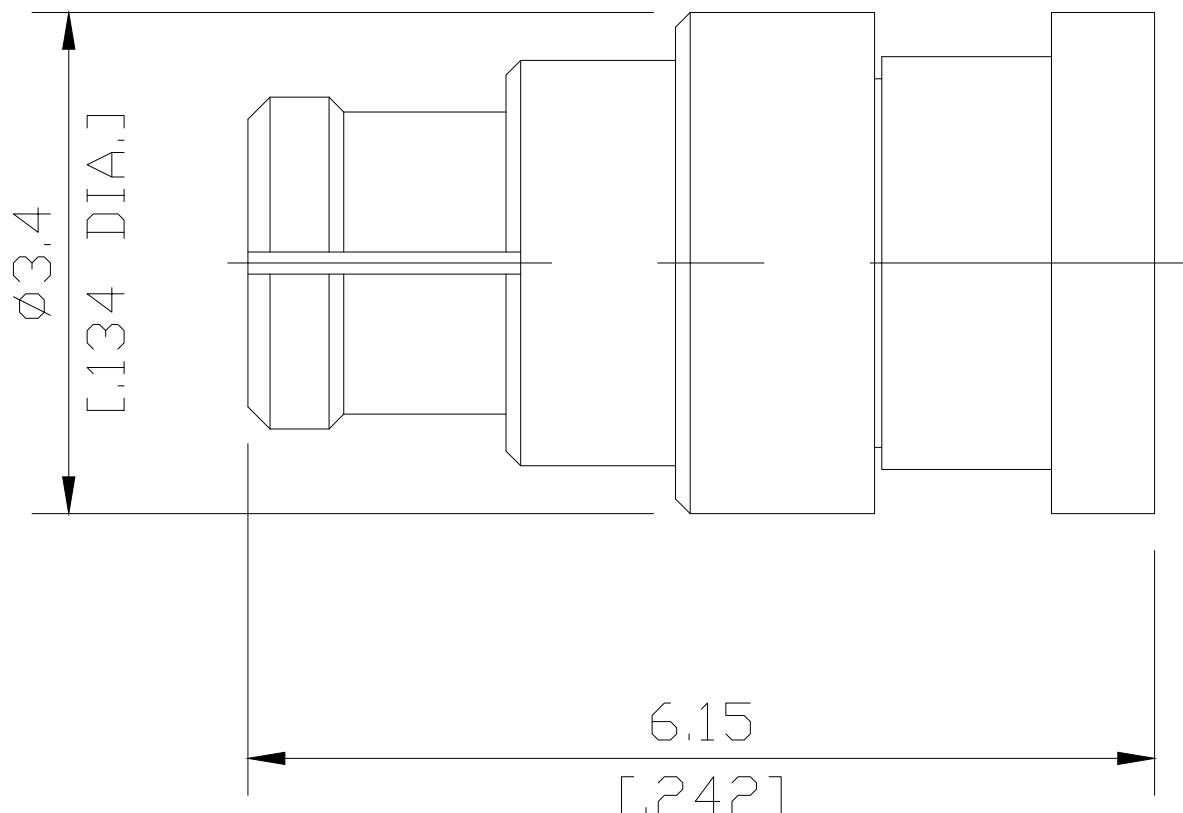

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

MIL-STD-348A/328-2

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.40 ( $\geq 15.56$ dB) 26.5 to 40 GHz
Insertion Loss	≤ 0.1 $\times \sqrt{f}$ (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 6.0 mΩ
Outer Contact Resistance	≤ 2.0 mΩ
Test Voltage (at sea level)	325 V rms
Working Voltage (at sea level)	50 V rms

- Limitations are possible due to the used cable type -

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

SMPM Jack (Female) Snap-On Connector Solder Attachment  
for .085, .086, RG405, EF085 DC-40 GHz VSWR 1.40

## SMPM2E50-EZ0085A / 99

## Mechanical Data

Coupling mechanisms	Snap-on
Mating Cycles	Mating with Smooth Bore $\geq 1000$ Mating with Limited Detent $\geq 500$ Mating with Full Detent $\geq 100$
Center contact captivation	$\geq 7$ N
Engagement Force	Smooth Bore 19 N max. Full Detent 11 N max.
Disengagement force	Smooth Bore 29 N min. Full Detent 7 N min.
Centre Contact	Plug-in
Cable entry	Soldered

## Environmental Data

Temperature Range	-65 °C to +155 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. A
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

## Suitable Cables

.085, .086, RG405, EF085

## Packing

Single or 100