


**TNC Plug (Male) Connector Cable Entry: Crimp, Center Pin: Crimp or Solder Attachment for RG214 Cable, DC- 6GHz VSWR1.38**

**TNC1C50-G214C / 144**

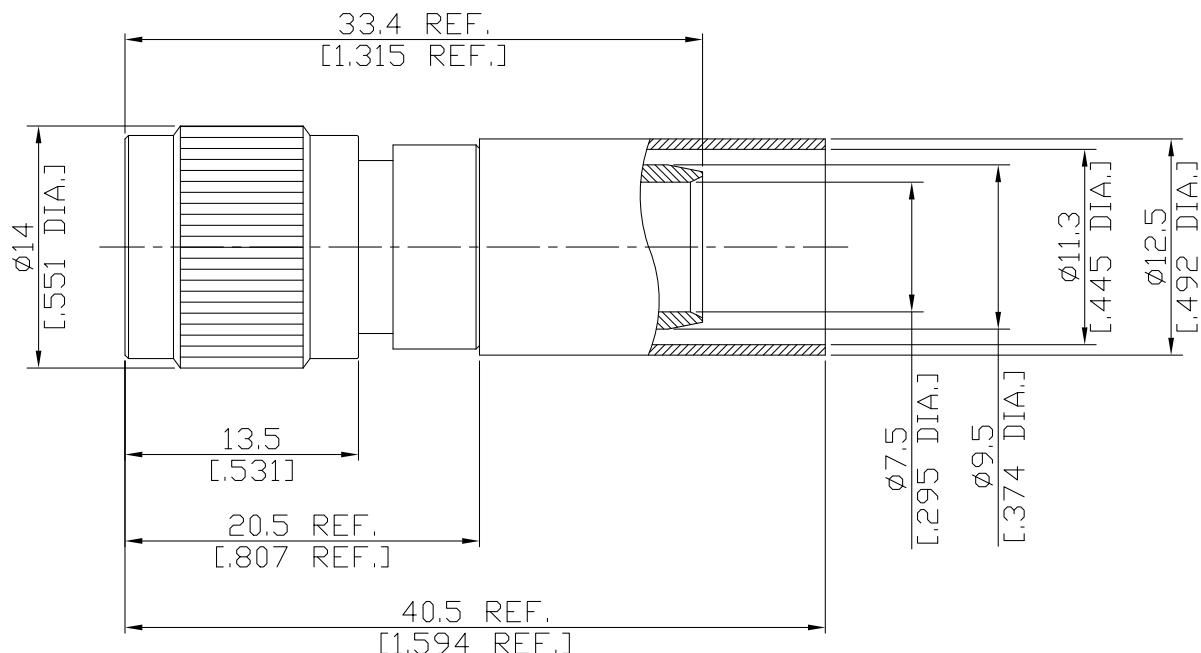

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to

IEC 61169-17;CECC 22 200;MIL-PRF-39012;TNC-Interface MIL-STD-348/313

#### Electrical Data

Impedance 50 Ω

Frequency DC to 6 GHz

VSWR (Return Loss) ≤ 1.8 ( $\geq 15.94$  dB)

Insertion Loss  $\leq 0.05 \times \sqrt{f}$  (GHz) dB

Insulation Resistance  $\geq 5$  GΩ

Center Contact Resistance  $\leq 1.5$  mΩ

Outer Contact Resistance  $\leq 1.0$  mΩ

Test Voltage 1500 V rms

Working Voltage 500 V rms

Power handling (at 20 °C, sea level)  $\leq 80$  W @ 2 GHz

-VSWR in application depends decisive on cable assembly process-

#### Material And Plating

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Ferrule	Brass	Copper-Tin-Zinc Alloy

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:  
DEC/10/2024

Rosnol RF/Microwave Technology Co., Ltd.

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

TNC Plug (Male) Connector Cable Entry: Crimp, Center Pin: Crimp or Solder  
Attachment for RG214 Cable, DC- 6GHz VSWR1.38

## TNC1C50-G214C / 144

## Mechanical Data

Coupling Mechanisms	Screw-Lock
Mating Cycles	≥ 500
Centre Contact	Crimped or Soldered
Cable Entry	Crimped
Coupling Test Torque	≤ 1.7 Nm
Recommended Torque	0.46 Nm to 0.69 Nm

## Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

## Suitable Cables

RG214, RG9, RG225, RG393

## Packing

Single or 100