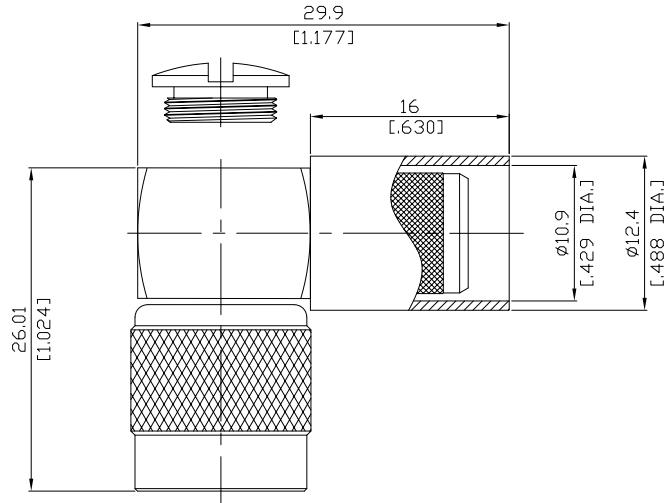



TNC (Male) Right Angle Cable Crimp Plug
TNC1C59-R400A/133


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-17; MIL-STD-348B/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR (Return Loss)

≤ 1.35 (≥ 16.54 dB)

- Limitations are possible due to the used cable type and manufacturing process -
Mechanical Data

Coupling mechanisms

Screw-lock

Centre contact

Soldered

Cable entry

Crimped

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating
Connector parts
Material
Plating

Centre contact

Brass

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Nickel

Crimp ferrules

Brass

Nickel

Suitable Cables

LMR-400, RNL-400, Belden 7810A, Belden 8214, Belden 9913, LMR-400-UF, RNL-400-UF

Packing

Single or 100