




TNC Straight Cable Plug

TNC1E50-0085A/144

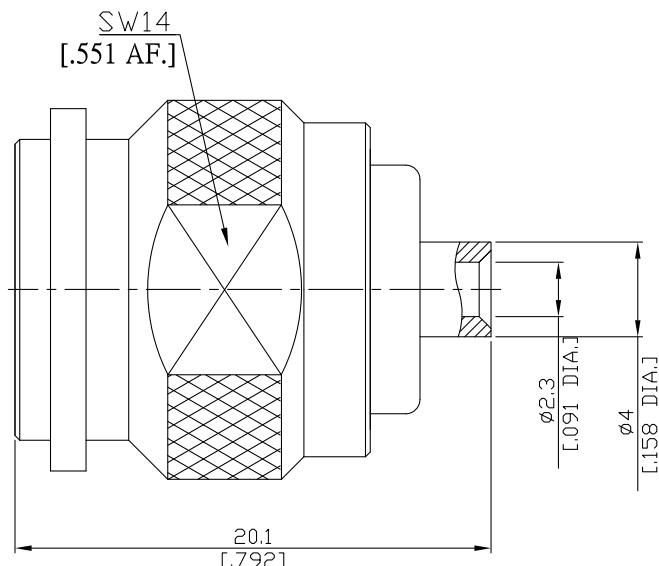

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012; MIL-STD-348A/313

Electrical Data

Impedance 50 Ω

Frequency DC to 11 GHz

VSWR (Return Loss) ≤ 1.09 (≥ 27 dB), DC to 2 GHz

≤ 1.12 (≥ 25 dB), 2 to 4 GHz

≤ 1.22 (≥ 20 dB), 4 to 6 GHz

Insertion Loss ≥ 0.05 dB, DC to 6 GHz

- Digressions are possible due to the used cable type and manufacturing process -
Mechanical Data

Coupling mechanisms Screw-lock

Centre contact Soldered

Cable entry Soldered

Environmental Data

Temperature range -65 °C to +165 °C

RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Suitable Cables

RSR-085, RSF-085, RSF-085-FEP, UT 85, RG 405/U, RTK- FS 085, RTK- Flex 405, BELDEN 1671A

Packing

Single or 100