


TNC Plug (Male) Connector Solder Attachment
for RSR141, RSF141, EF402, .141 Cables, RG402 DC-10GHz VSWR 1.20

TNC1E50-0141A / 933

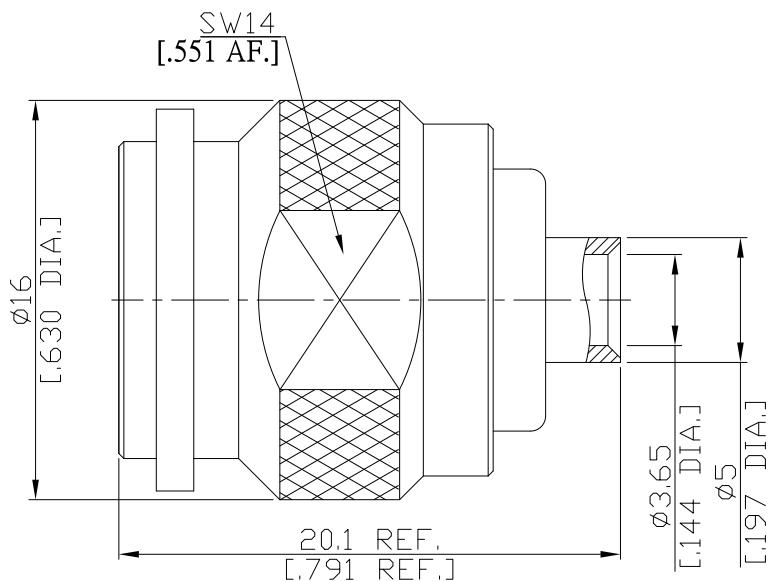

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17;CECC 22 200;MIL-PRF-39012;TNC-Interface MIL-STD-348/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 10 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 1.5 mΩ

Outer Contact Resistance

≤ 1.0 mΩ

Test Voltage

1500 V rms

Working Voltage

500 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 80 W @ 2 GHz

-VSWR in application depends decisive on cable assembly process-

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Nickel

TNC Plug (Male) Connector Solder Attachment
for RSR141, RSF141, EF402, .141 Cables, RG402 DC-10GHz VSWR 1.20

TNC1E50-0141A / 933

Mechanical Data

Coupling Mechanisms	Screw-Lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 15 N
Coupling Test Torque	Max. 1.7 Nm
Recommended Torque	0.46 Nm to 0.69 Nm
Centre Contact	Soldered
Cable Entry	Soldered

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Suitable Cables

RSR141, RSF141, EF402, .141 Cables, RG402

Packing

Single or 100