




TNC Straight Cable Jack

TNC2C50-R240A/HX

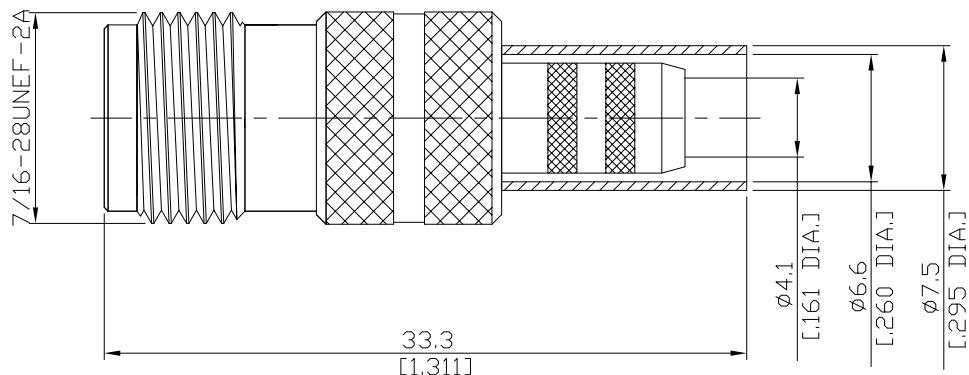

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-17; MIL-C-39012; MIL-STD-348A/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

- Limitations are possible due to the used cable type and manufacturing process -

Mechanical Data

Coupling mechanisms

Screw-lock

Centre contact

Soldered or Crimped

Cable entry

Crimped

Environmental Data

Temperature range

-65 °C to +165 °C

RoHS

compliant

Material And Plating

Connector parts

Material

Plating

Centre contact

Phosphor Bronze

Gold plating(Nickel underplated)

Body

Brass

Passivated

Insulator

PTFE

Crimp ferrules

Brass

Passivated

Suitable Cables

LMR 240, BELDEN H155, RNL-240


Packing

Single or 100

TNC Straight Cable Jack

TNC2C50-R240A/HX

Recommended Cable Stripping Dimensions

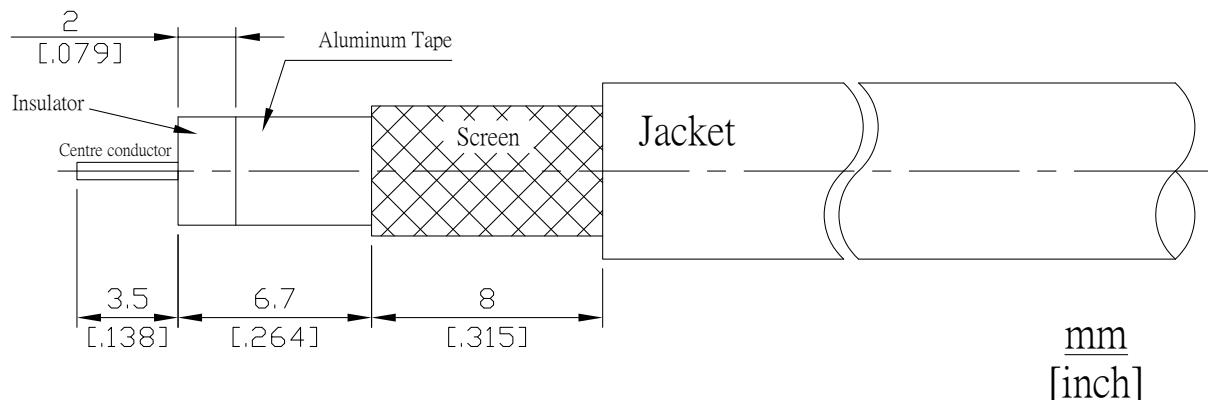

Crimp Dimensions [HEX]

Crimp ferrule
Centre contact

6.48mm [.255 inch]
1.73mm [.068 inch]