
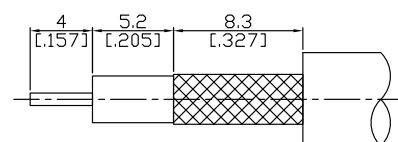
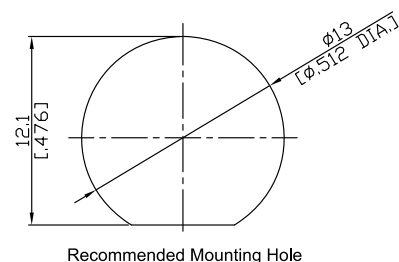


TNC Jack (Female) Bulkhead Connector Cable Entry: Crimp,
Center Pin: Crimp or Solder Attachment for RG-6 Cable, DC- 1GHz VSWR1.22

TNC2CA70-G006A / H4

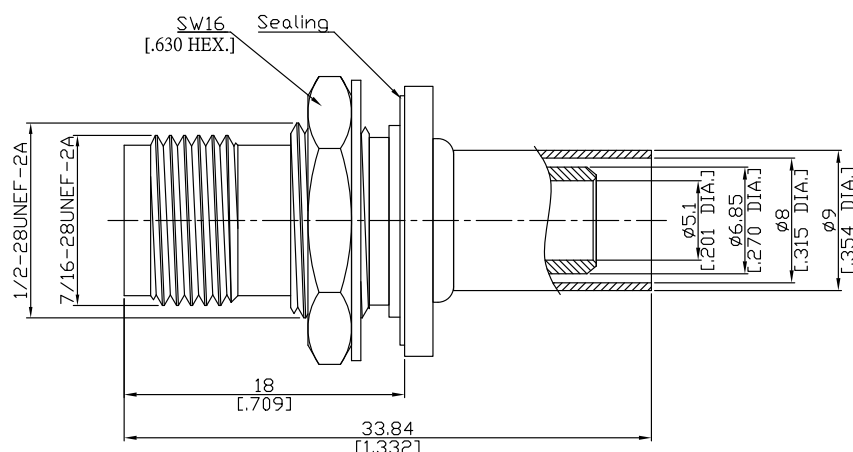

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17; CECC 22 200; MIL-PRF-39012; TNC-Interface MIL-STD-348/313

Electrical Data

Impedance	75 Ω
Frequency	DC to 1 GHz
VSWR (Return Loss)	≤ 1.22 (≥ 20.08 dB)
Insertion Loss	≤ 0.1x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 1.5 mΩ
Outer Contact Resistance	≤ 1.0 mΩ
Test Voltage	1500 V rms
Working Voltage	500 V rms
Power handling (at 20 °C, sea level)	≤ 80 W @ 2 GHz

-VSWR in application depends decisive on cable assembly process-

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 100 pinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Ferrule	Brass	Copper-Tin-Zinc Alloy

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:
Date:
NOV/20/2024

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page
1/2

TNC Jack (Female) Bulkhead Connector Cable Entry: Crimp,
Center Pin: Crimp or Solder Attachment for RG-6 Cable, DC- 1GHz VSWR1.22

TNC2CA70-G006A / H4

Mechanical Data

Coupling Mechanisms	Screw-Lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 27 N
Centre Contact	Crimped or Soldered
Cable Entry	Crimped
Coupling Test Torque	≤ 1.7 Nm
Recommended Torque	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Suitable Cables

RG-6

Packing

Single or 100