




**TNC(Female) Straight Cable Jack  
4-Hole Panel Flange**

**TNC2CBF50-G178A/H4**

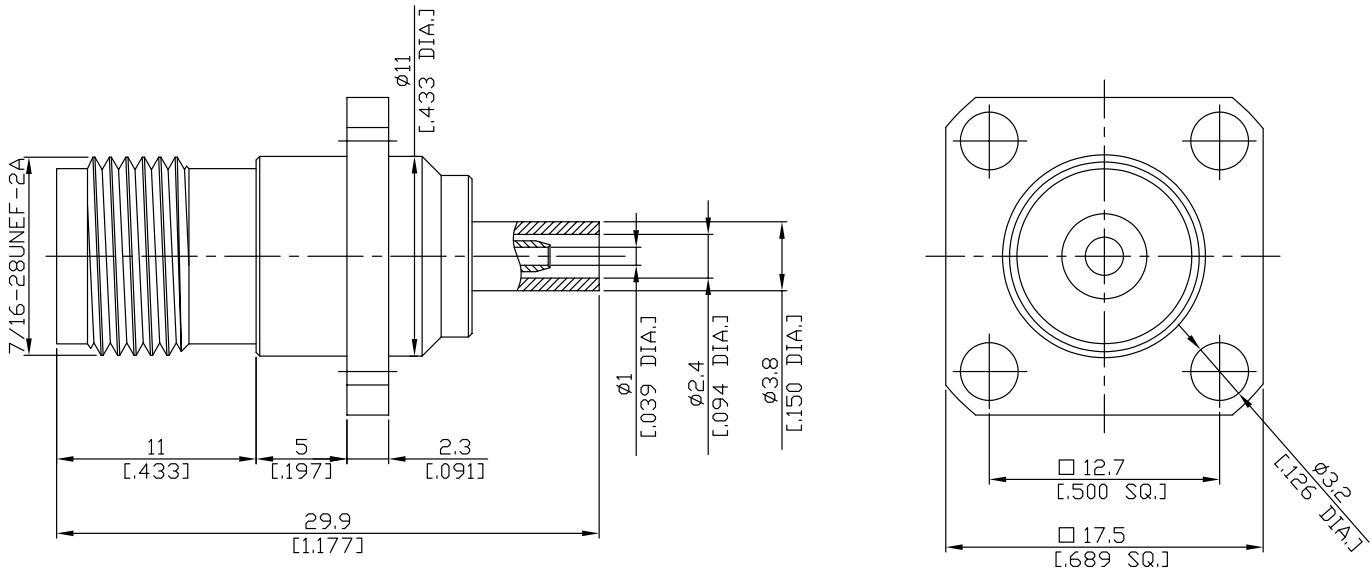

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-17; MIL-STD-348A/313

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 6 GHz

- limitations are possible due to the used cable type and manufacturing process -

**Mechanical Data**

Coupling mechanisms Screw-lock  
Centre contact Soldered or Crimped  
Cable entry Crimped

**Environmental Data**

Temperature range -65°C to +165°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Crimp ferrules	Brass	Copper-Tin-Zinc Alloy

**Suitable Cables**

RG 178, RG 195

**Packing**

Single, or 100

**TNC(Female) Straight Cable Jack  
4-Hole Panel Flange**

**TNC2CBF50-G178A/H4**

**Crimp Dimensions**

Crimp ferrule	3.25mm [.128 inch] HEX
Centre contact	0.7mm [.028 inch] SQ