


TNC Female Bulkhead 2-Hold Panel Mount Connector Solder Attachment for .141 Cable,
.463 inch D Hole

TNC2EABTE50-0141A / 93

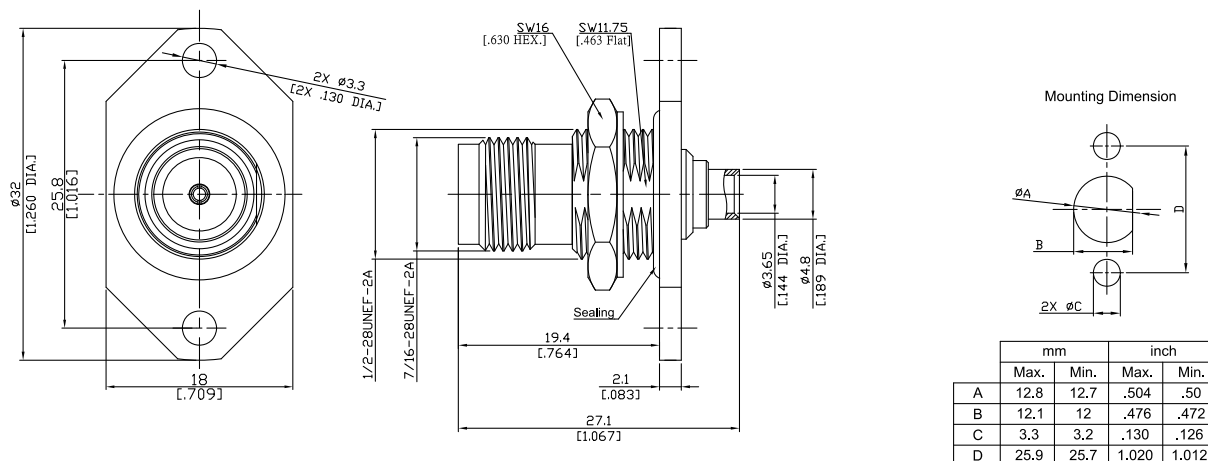

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17; CECC 22 200; MIL-PRF-39012; TNC-Interface MIL-STD-348/313

Electrical Data

Impedance	50 Ω
Frequency	DC to 10 GHz
VSWR (Return Loss)	≤ 1.20 (≥ 20.83 dB)
Insertion Loss	≤ 0.05 dB
Insulation Resistance	≥ 5 G Ω
Center Contact Resistance	≤ 1.5 m Ω
Outer Contact Resistance	≤ 1.0 m Ω
Test Voltage	1500 V rms
Working Voltage	500 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 80 W @ 2 GHz

-VSWR in application depends decisive on cable assembly process-

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Nickel
Fastening nut	Brass	Copper-Tin-Zinc Alloy
Washer	Brass	Copper-Tin-Zinc Alloy

**TNC Female Bulkhead 2-Hold Panel Mount Connector Solder Attachment for .141 Cable,
.463 inch D Hole**

TNC2EABTE50-0141A / 93

Mechanical Data

Coupling Mechanisms	Screw-Lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 15 N
Coupling Test Torque	Max. 1.7 Nm
Recommended Torque	0.46 Nm to 0.69 Nm
Centre Contact	Soldered
Cable Entry	Soldered

Environmental Data

Temperature Range	-65°C to +165°C
Thermal Shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition G
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Suitable Cables

RSR 141, RSF 141, EF402, .141 Cables, RG402

Packing

Single or 100