


TNC Reverse Polarity Straight Cable Jack

TNC7C50-R400A/14

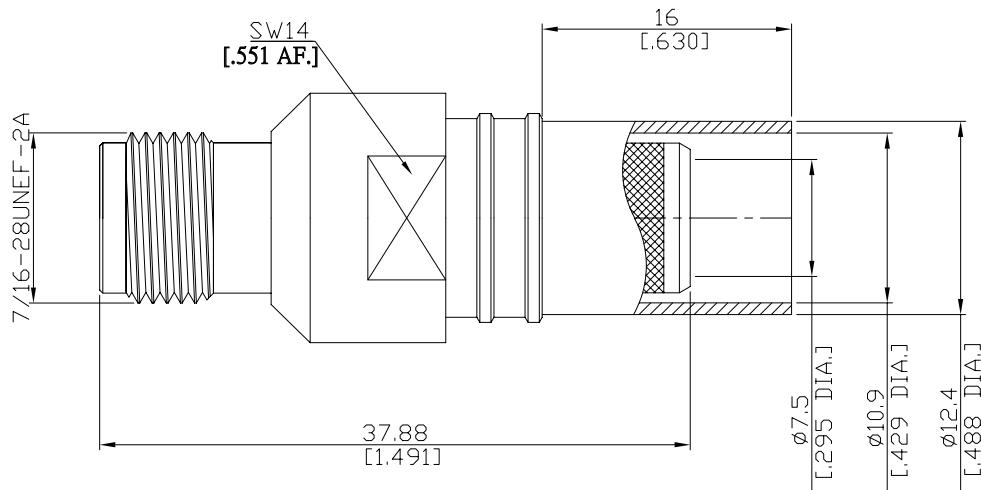

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Derived from

IEC 60169-17; MIL-STD-348A/313

Electrical Data

 Impedance 50 Ω
 Frequency DC to 6 GHz

- Limitations are possible due to the used cable type and manufacturing process -
Mechanical Data

 Coupling mechanisms Screw-lock
 Centre contact Soldered
 Cable entry Crimped

Environmental Data

 Temperature range -65°C to +165°C
 RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Crimp ferrules	Brass	Copper-Tin-Zinc Alloy

Suitable Cables

LMR 400, LMR 400 UF, RNL-400, Ecoflex 10

Packing

Single or 100

TNC Reverse Polarity Straight Cable Jack

TNC7C50-R400A/14

Recommended Cable Stripping Dimensions

