


UHF Jack (Female) Cable Connector

UHF2CN0-G214A/H3

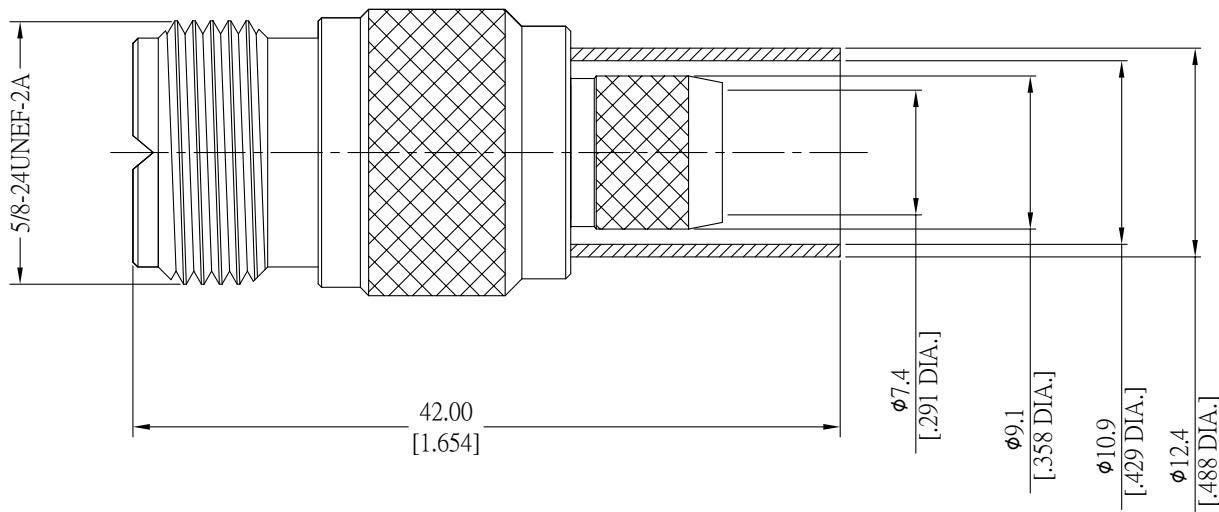

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-12

Electrical Data

Impedance non-constant
Frequency DC to 300 MHz

Mechanical Data

Coupling mechanisms Screw-lock
Centre contact Solder, Crimp
Cable entry Crimp

Environmental Data

Temperature range -55 °C to +149 °C
RoHS compliant
REACH compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Suitable Cables

RG-214/U, RG-393/U

Packing

Single or 100